

**FIG. 1A**  
(PRIOR ART)

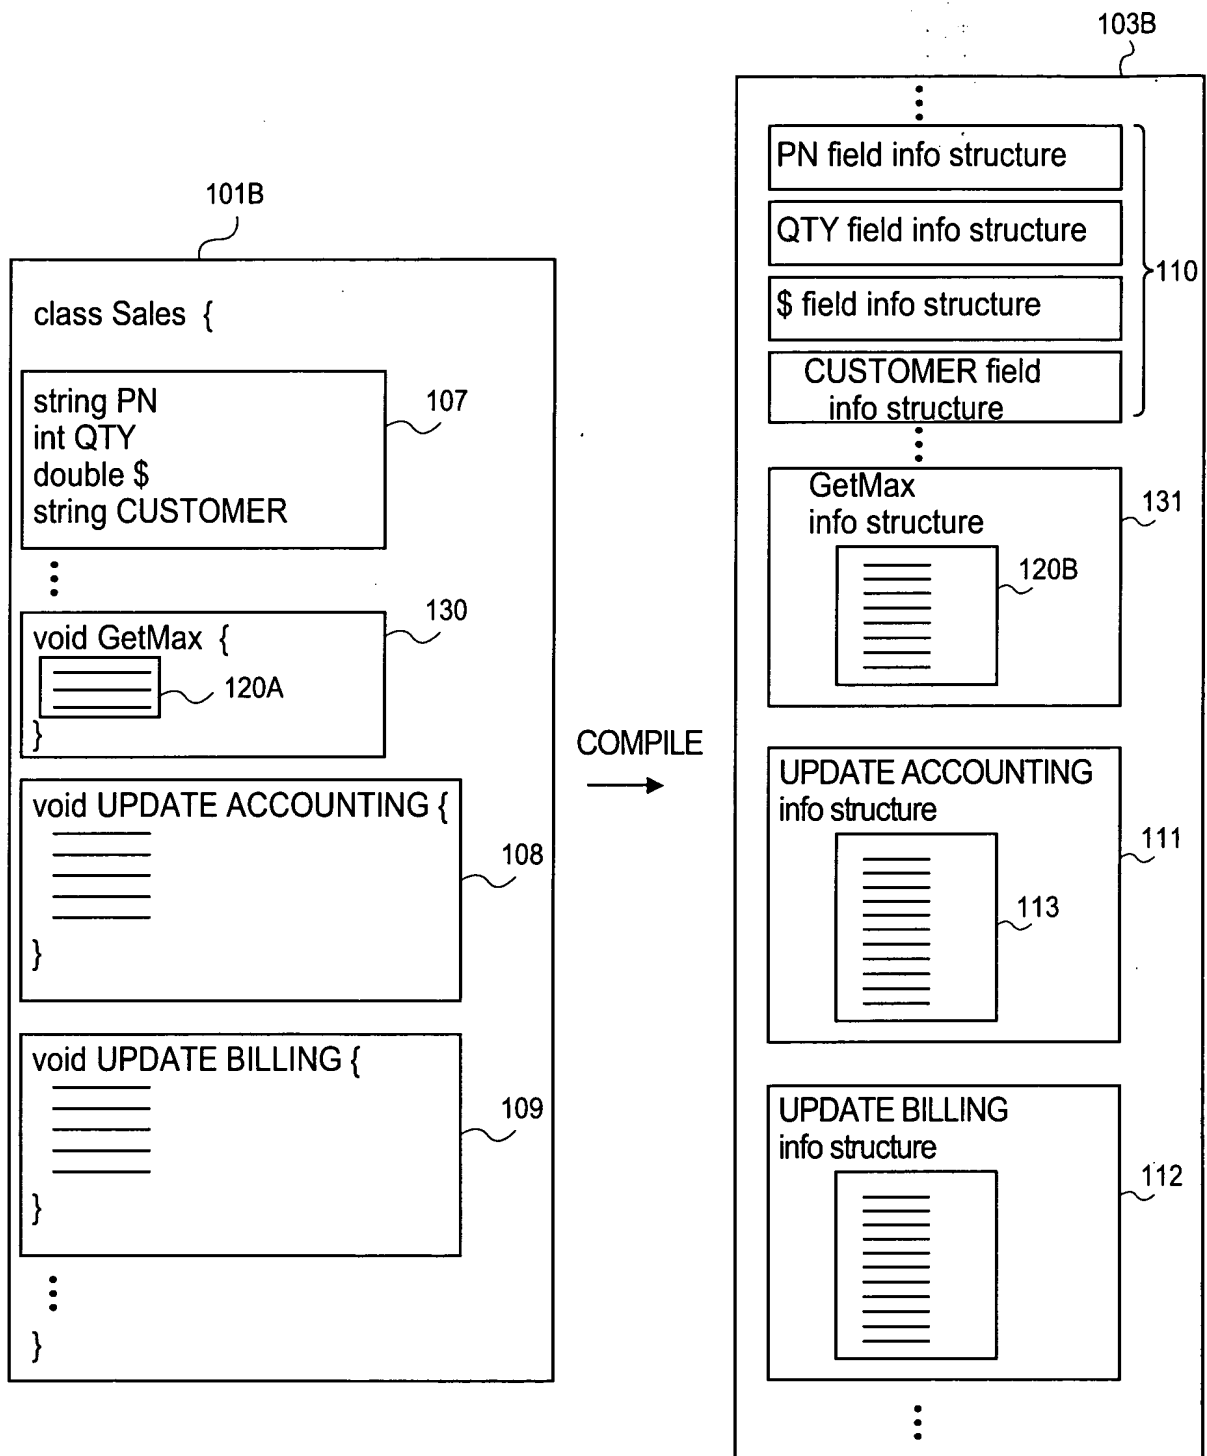
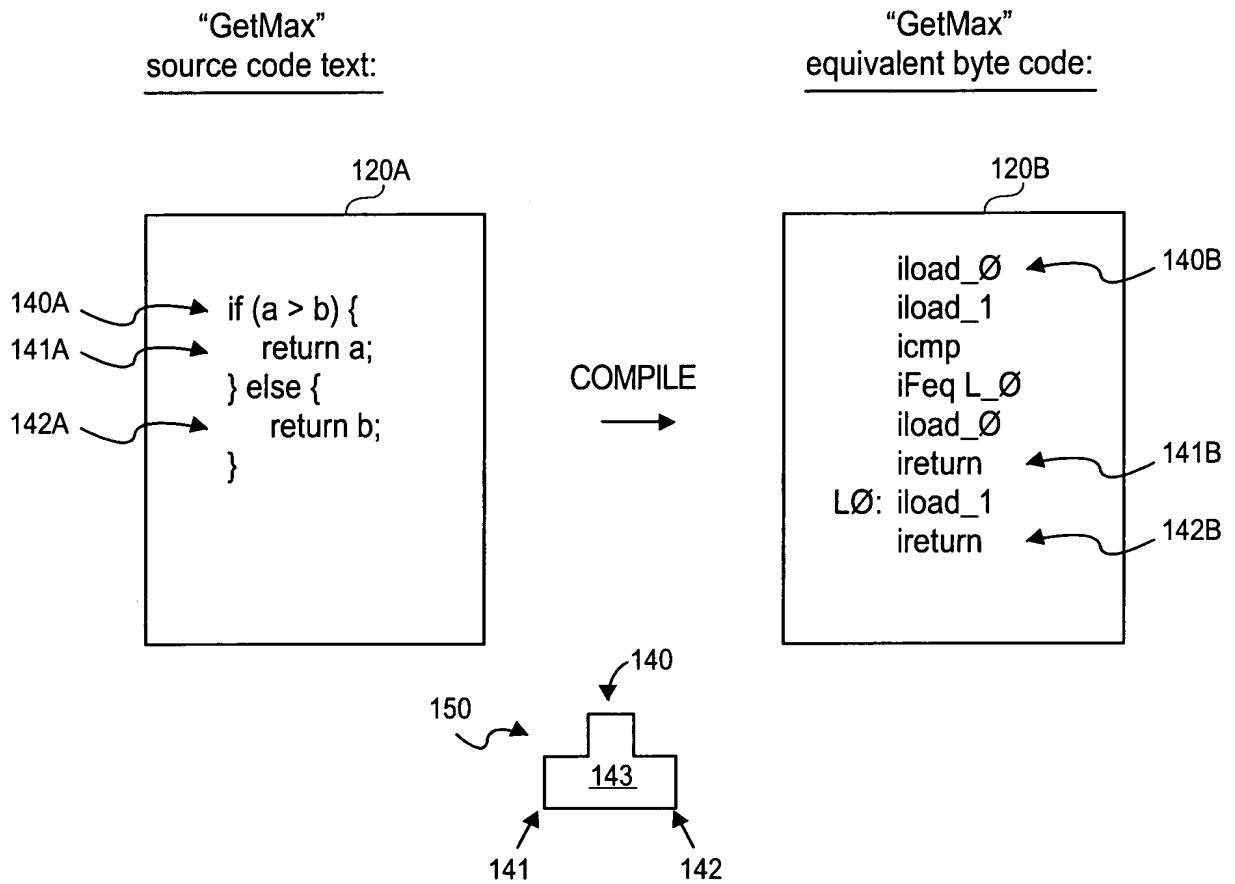
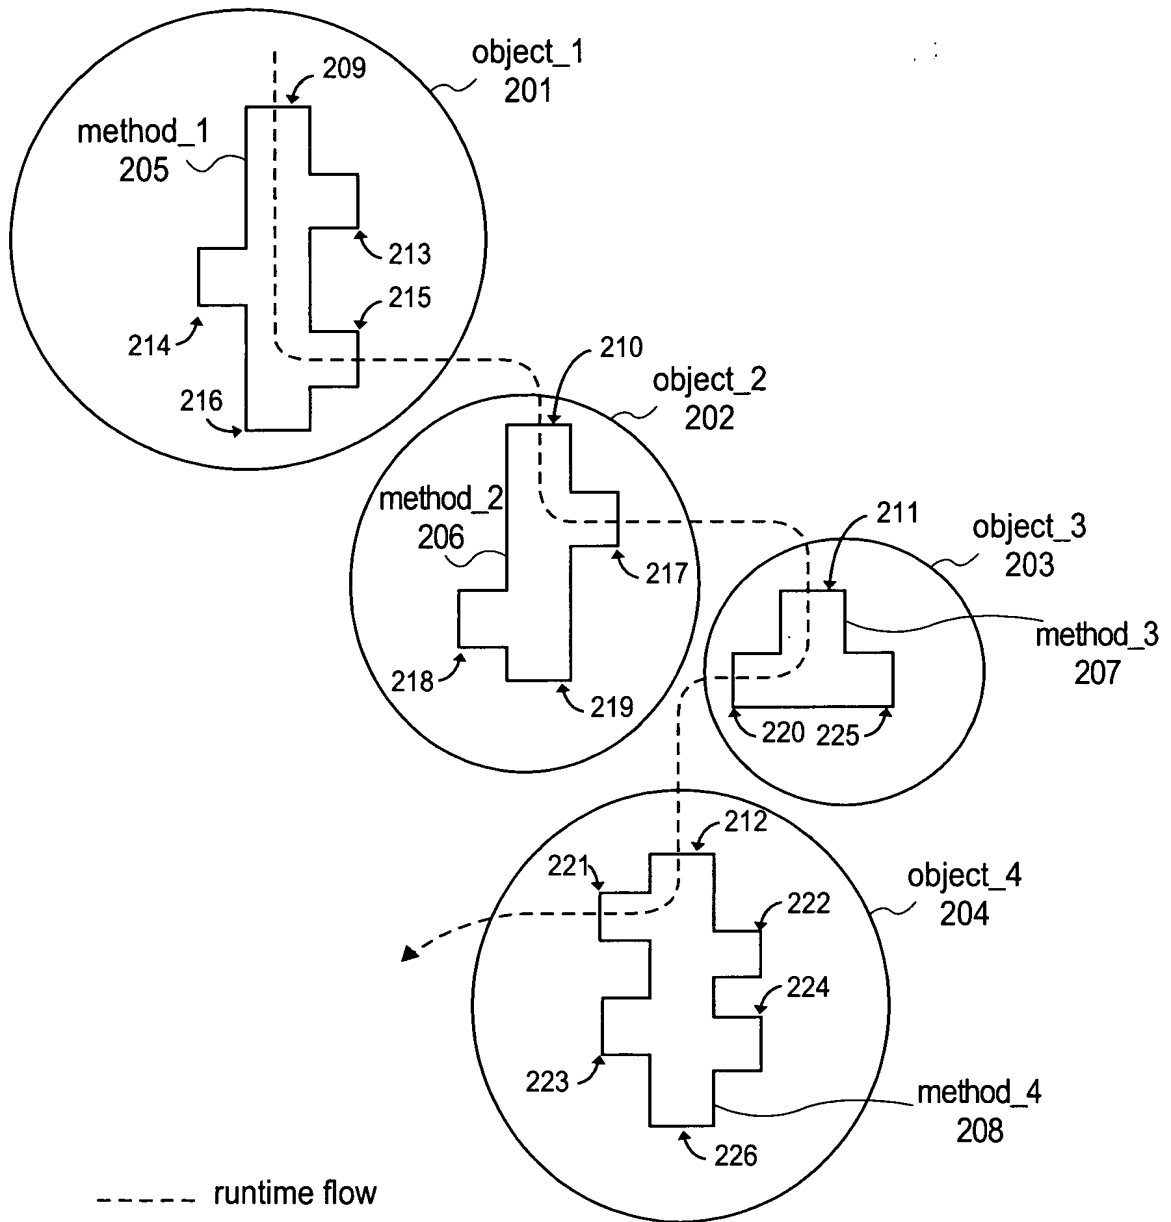


FIG. 1B  
(PRIOR ART)



**FIG. 1C**  
(PRIOR ART)



**FIG. 1D**  
(PRIOR ART)

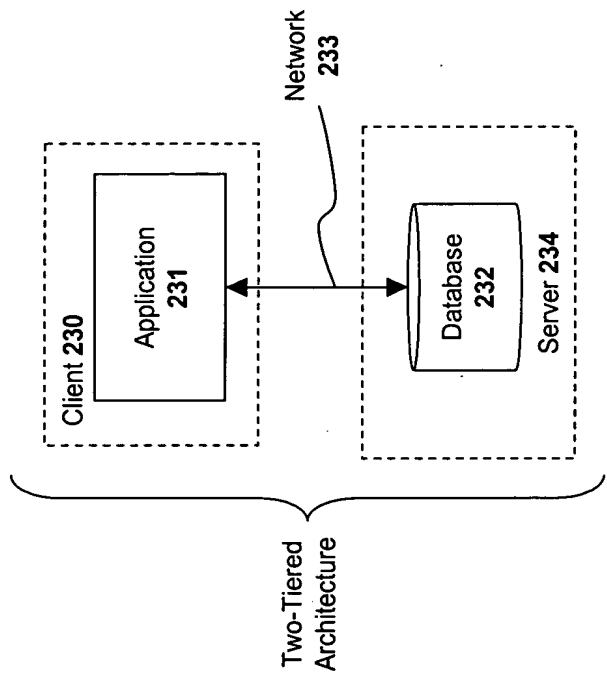


FIG. 2A  
(prior art)

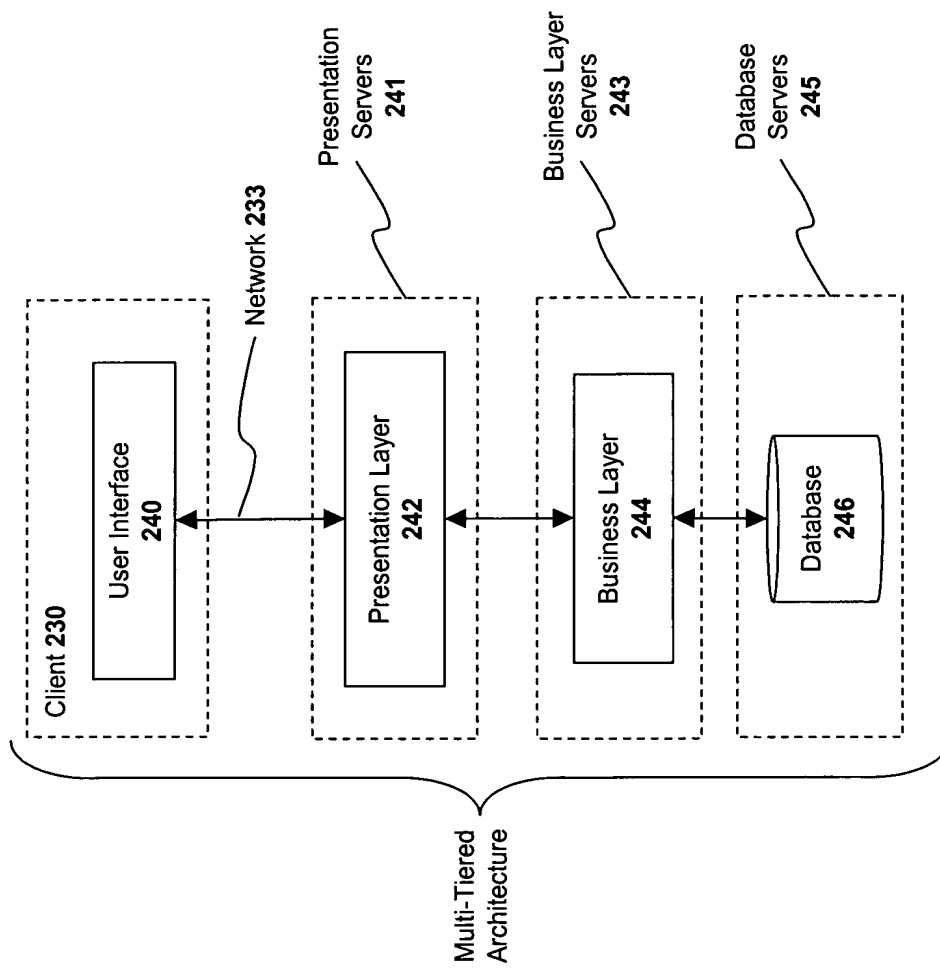
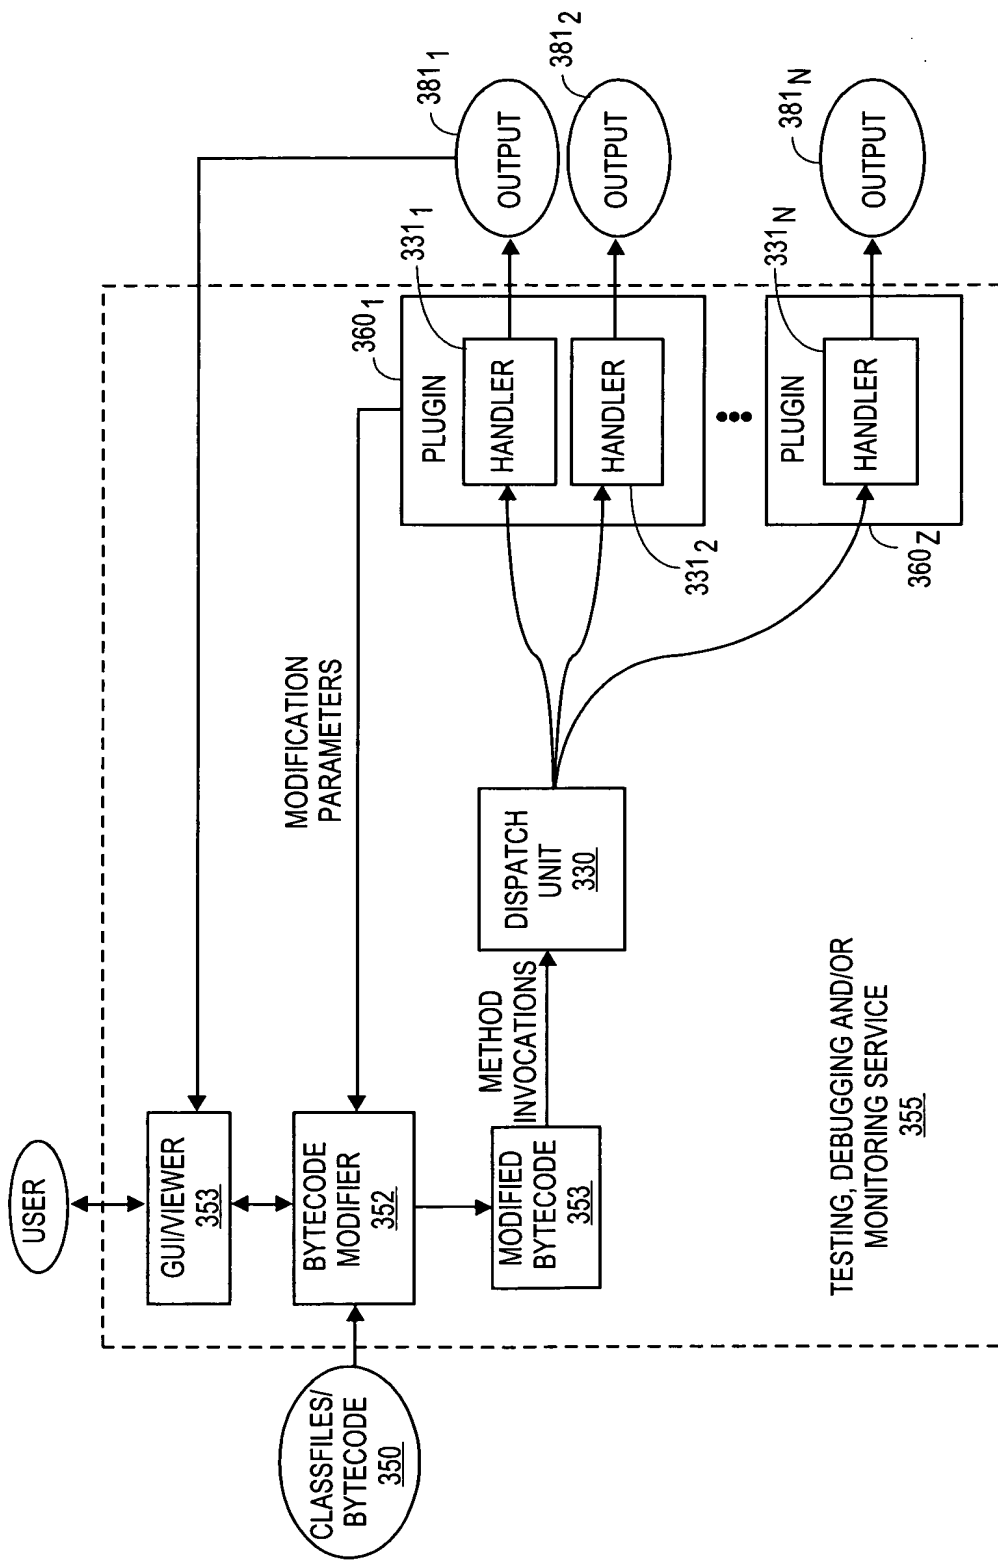


FIG. 2B  
(prior art)



**FIG. 3**

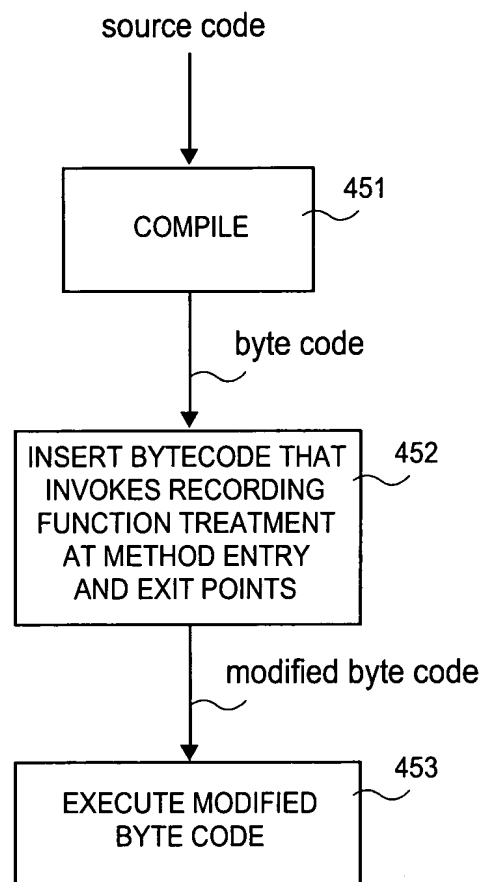
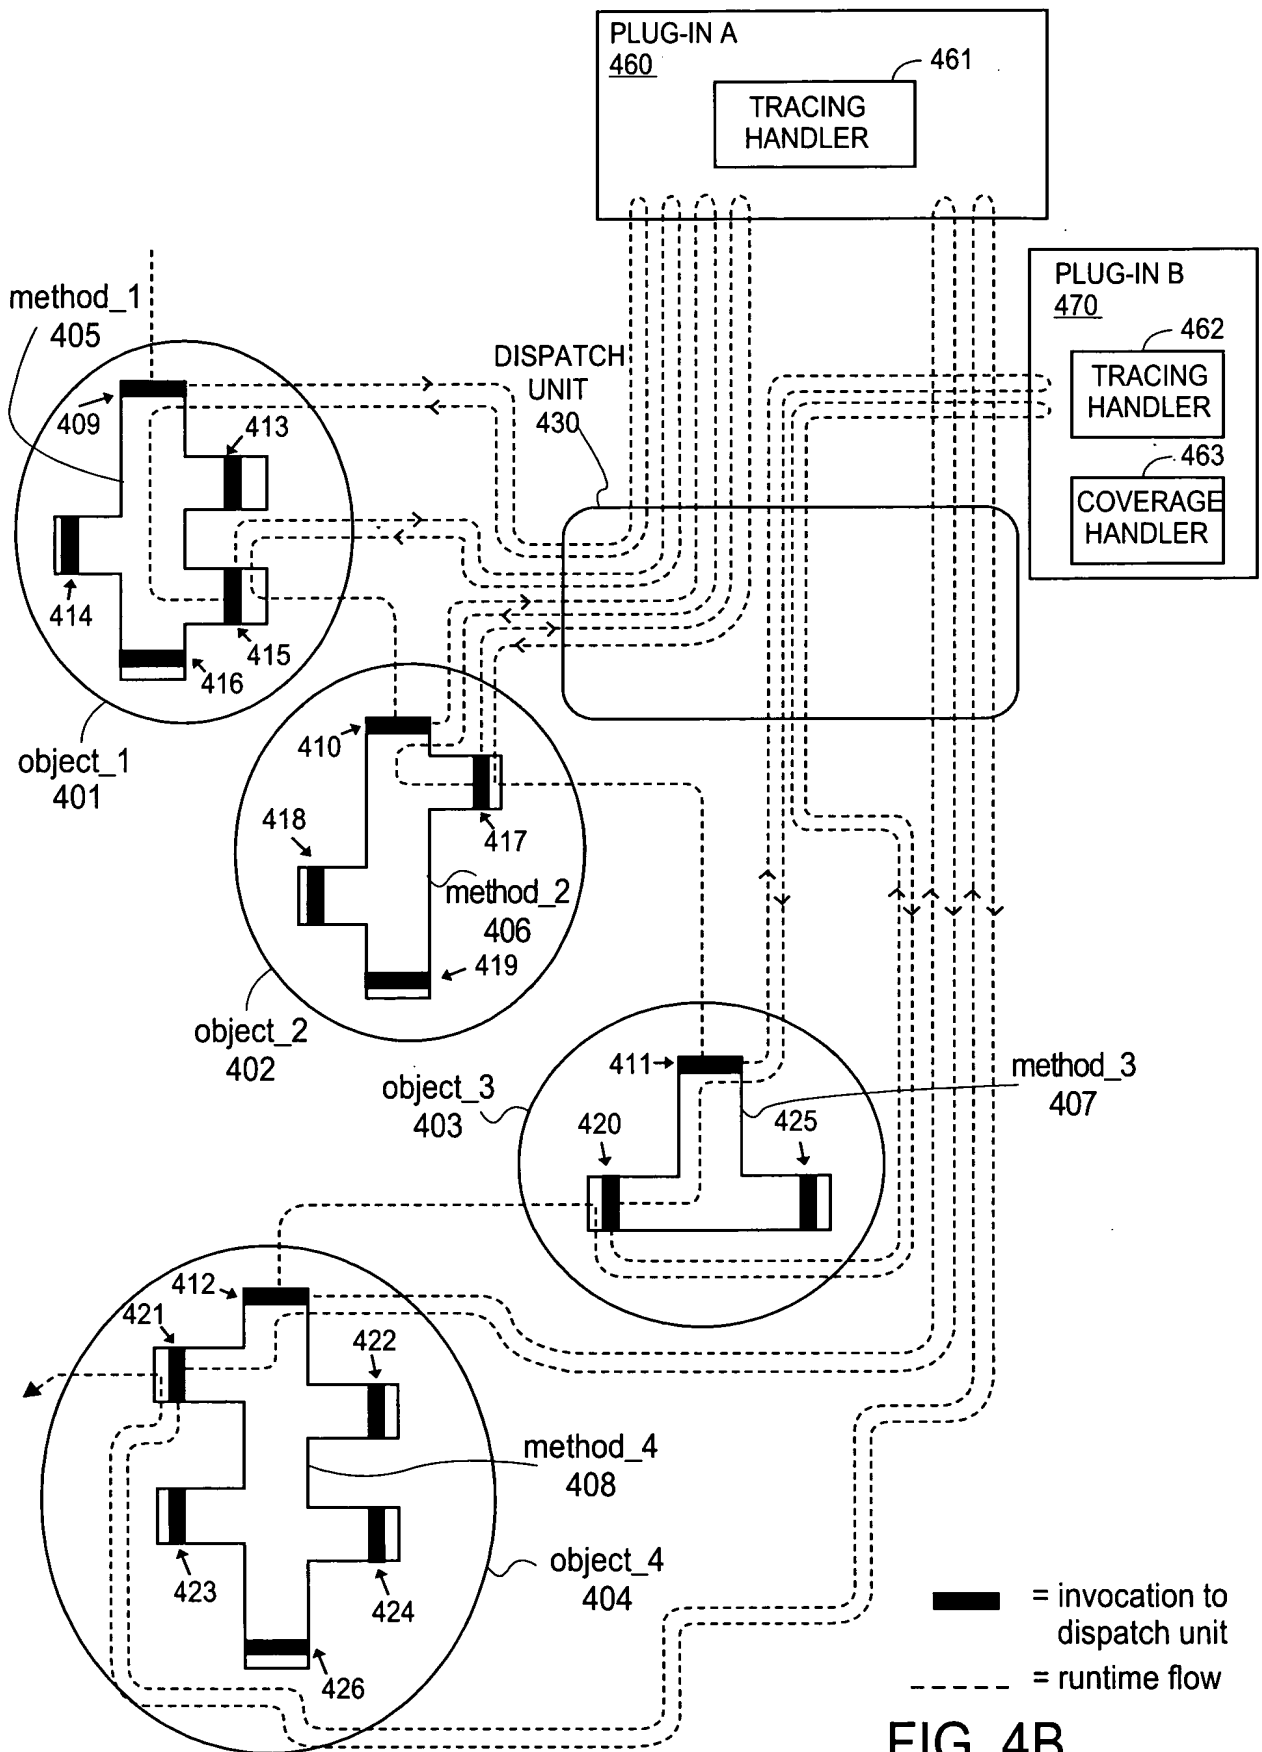
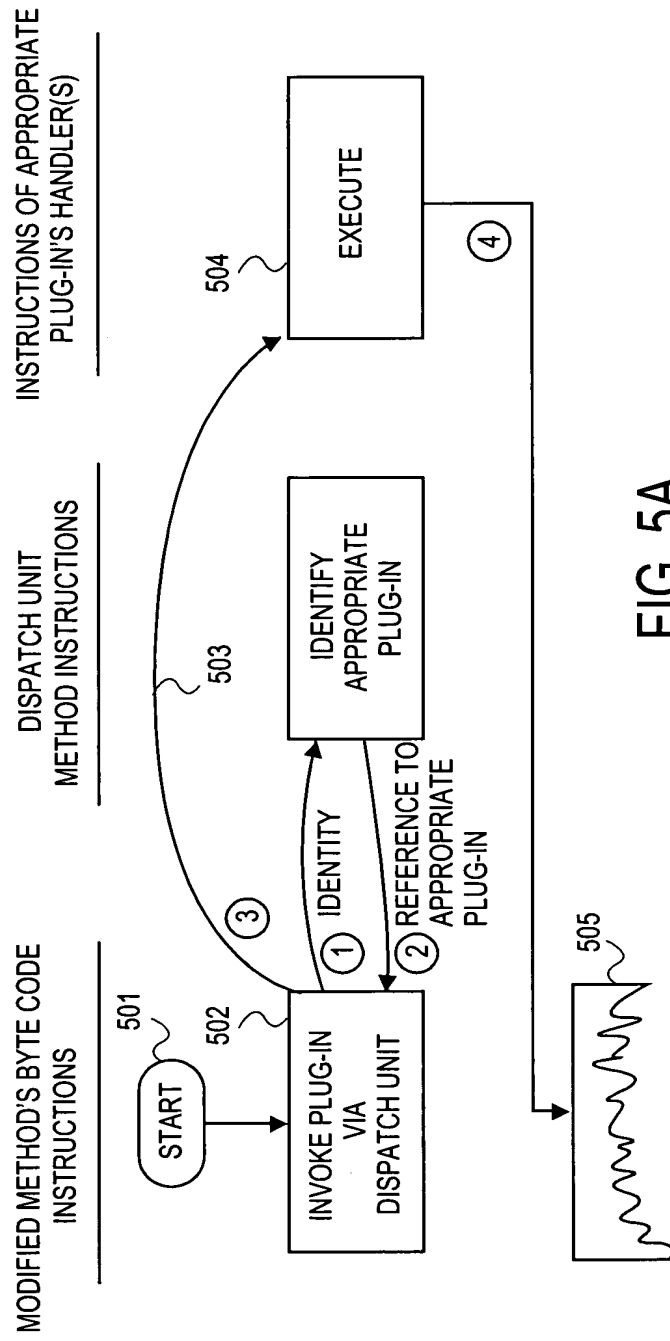


FIG. 4A







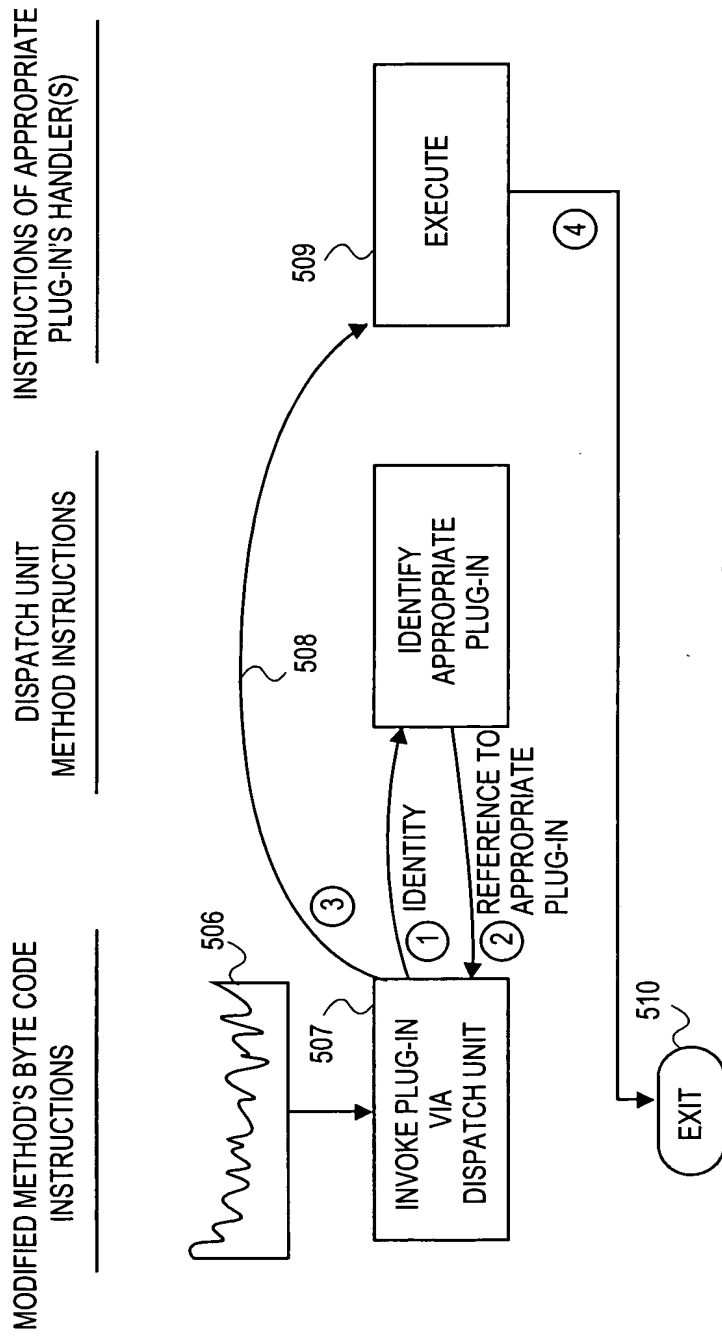


FIG. 5B

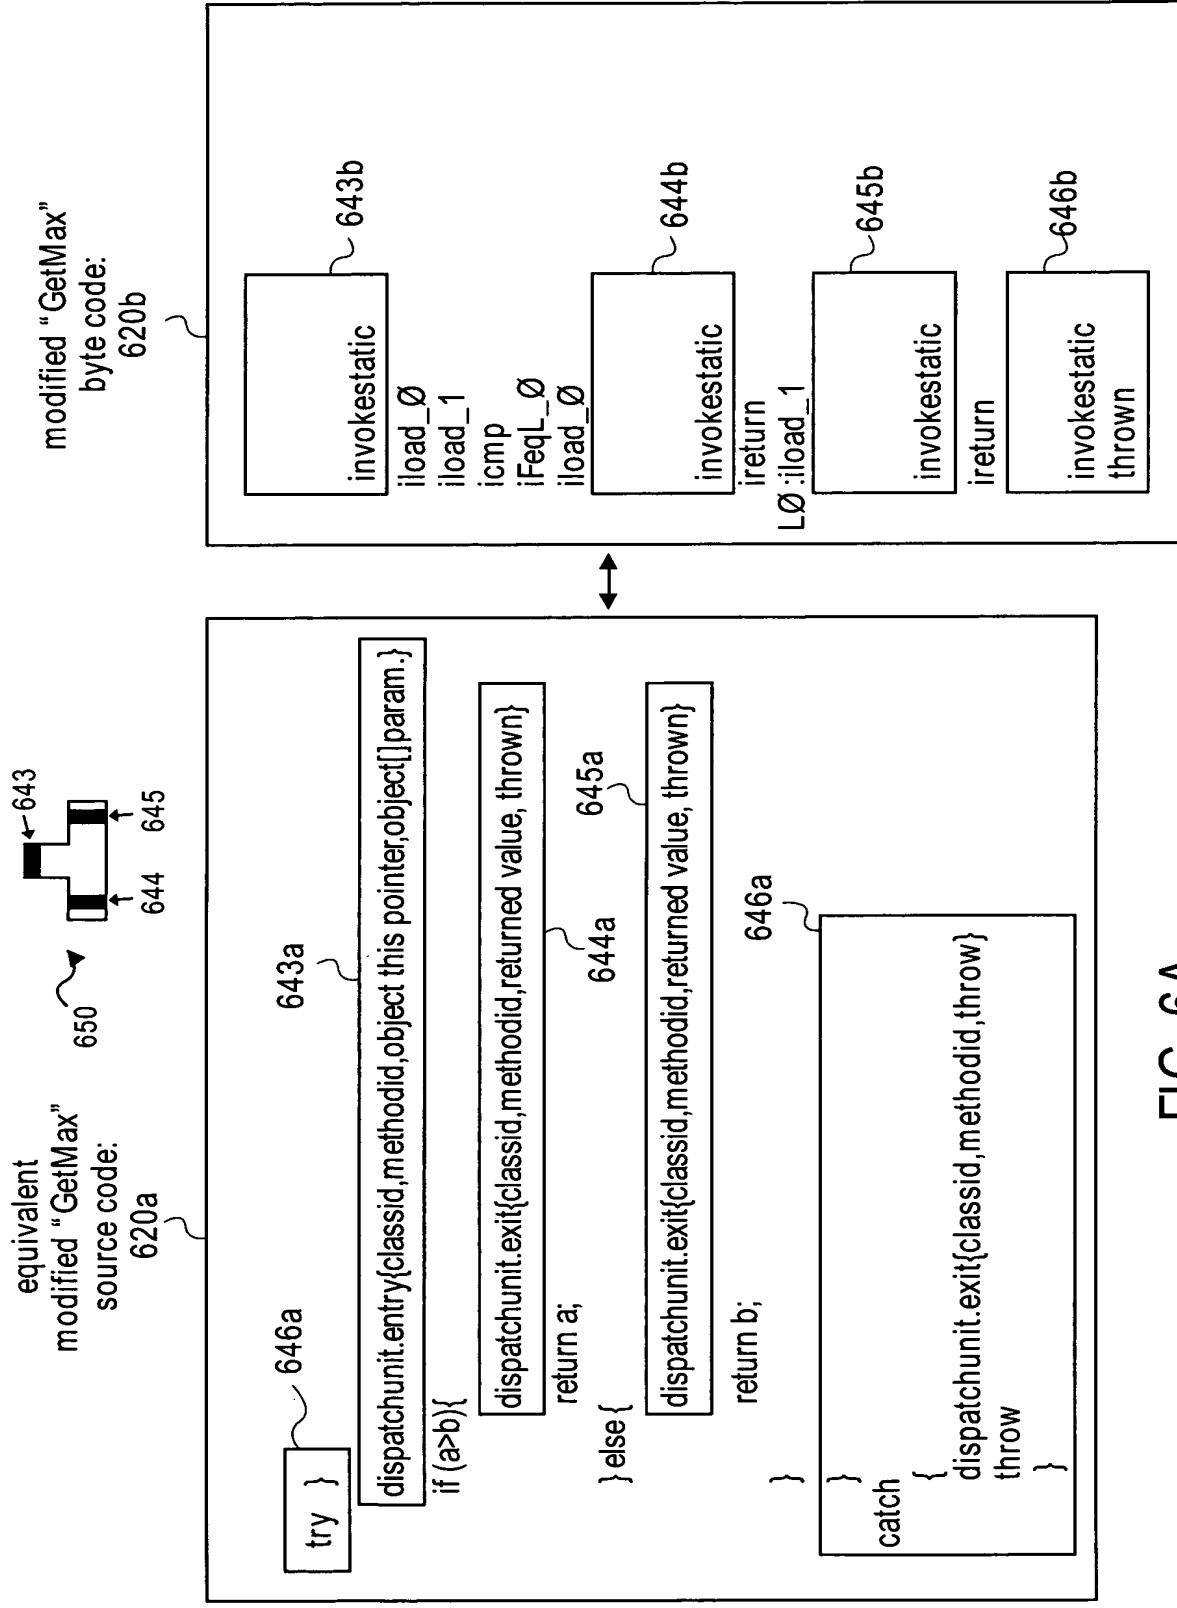


FIG. 6A

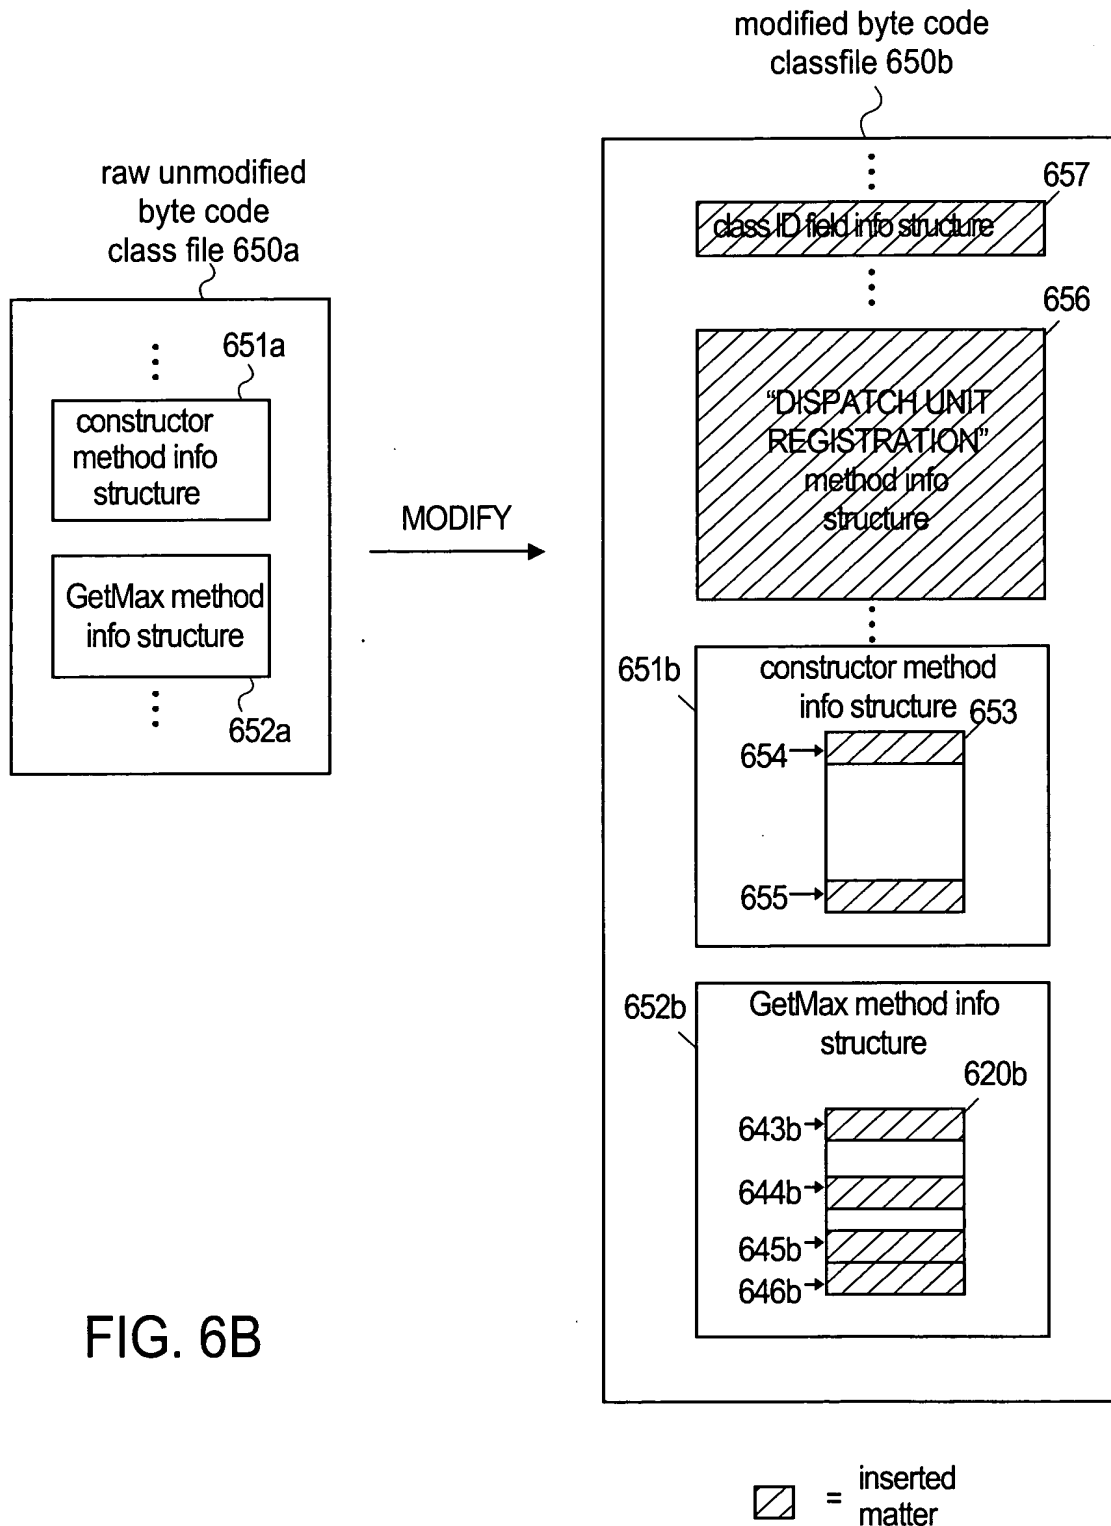


FIG. 6B

701

	INVOKING METHOD	PLUG IN MODULE
(method_1)	C <sub>1</sub> , M <sub>1</sub> , args <sub>11</sub>	PIM_A
(method_2)	C <sub>1</sub> , M <sub>2</sub> , args <sub>12</sub>	PIM_A
(method_3)	C <sub>2</sub> , M <sub>1</sub> , args <sub>21</sub>	PIM_B
(method_4)	C <sub>3</sub> , M <sub>1</sub> , args <sub>31</sub>	PIM_A

FIG. 7

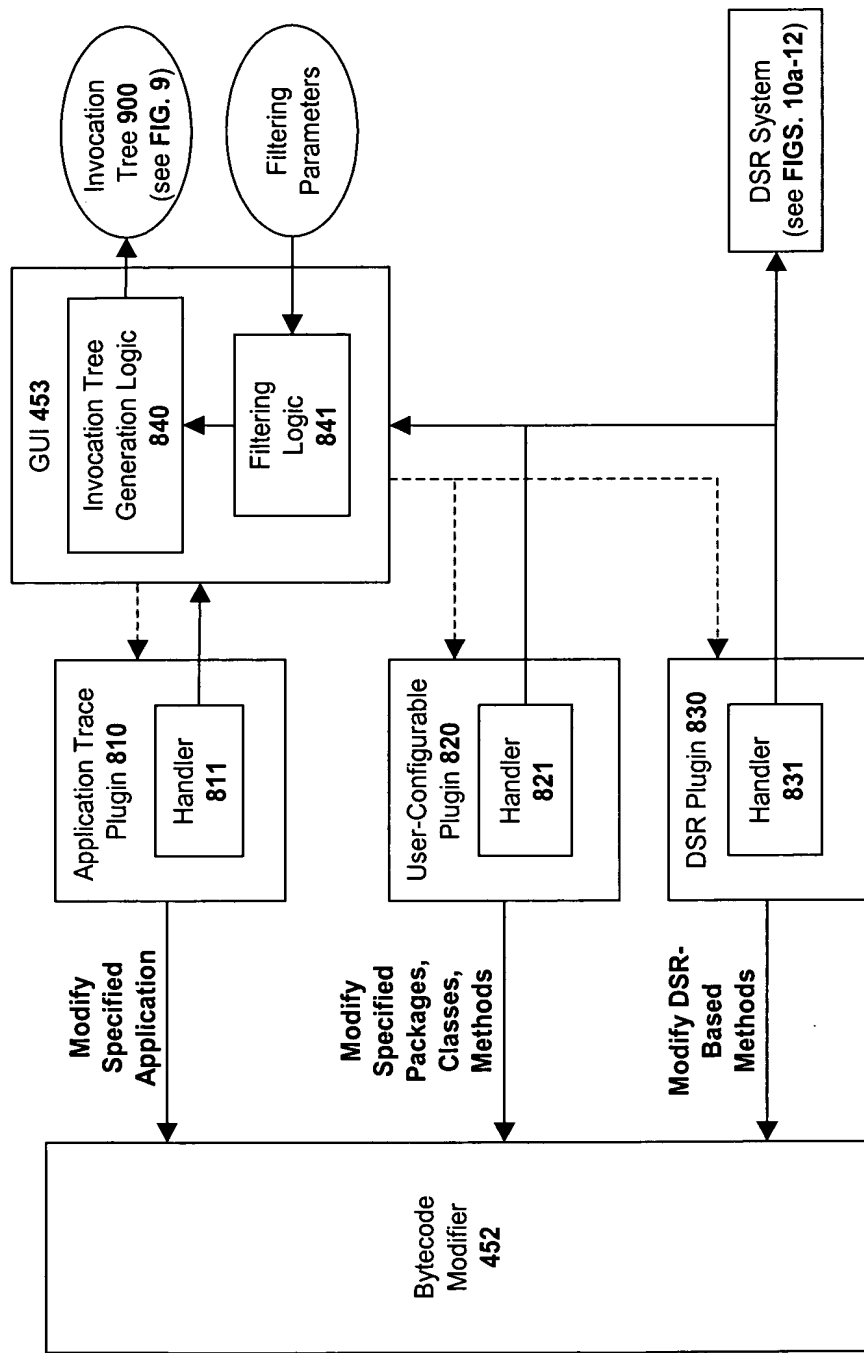


FIG. 8

# Invocation Tree

900

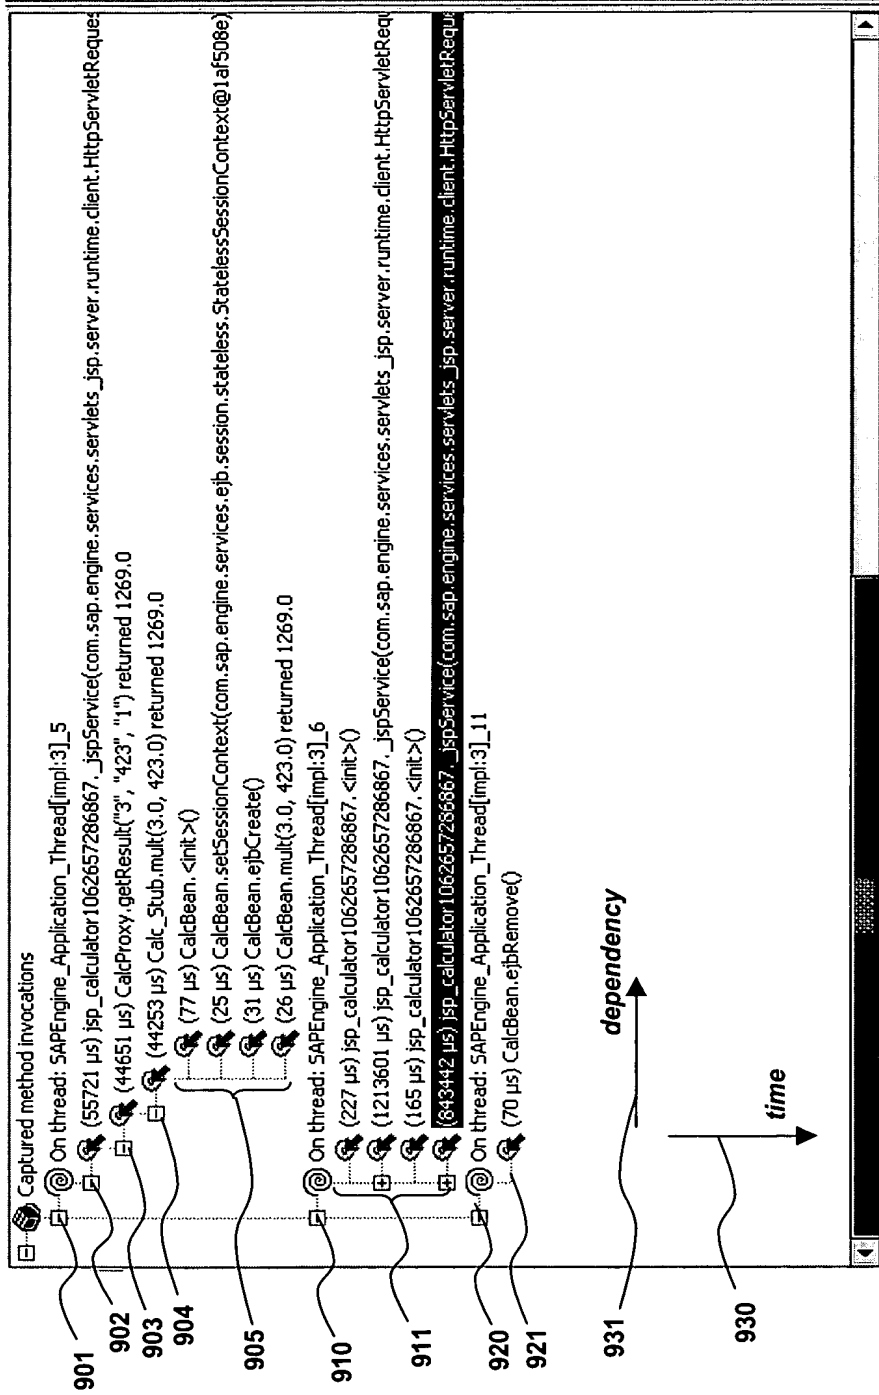


FIG. 9A



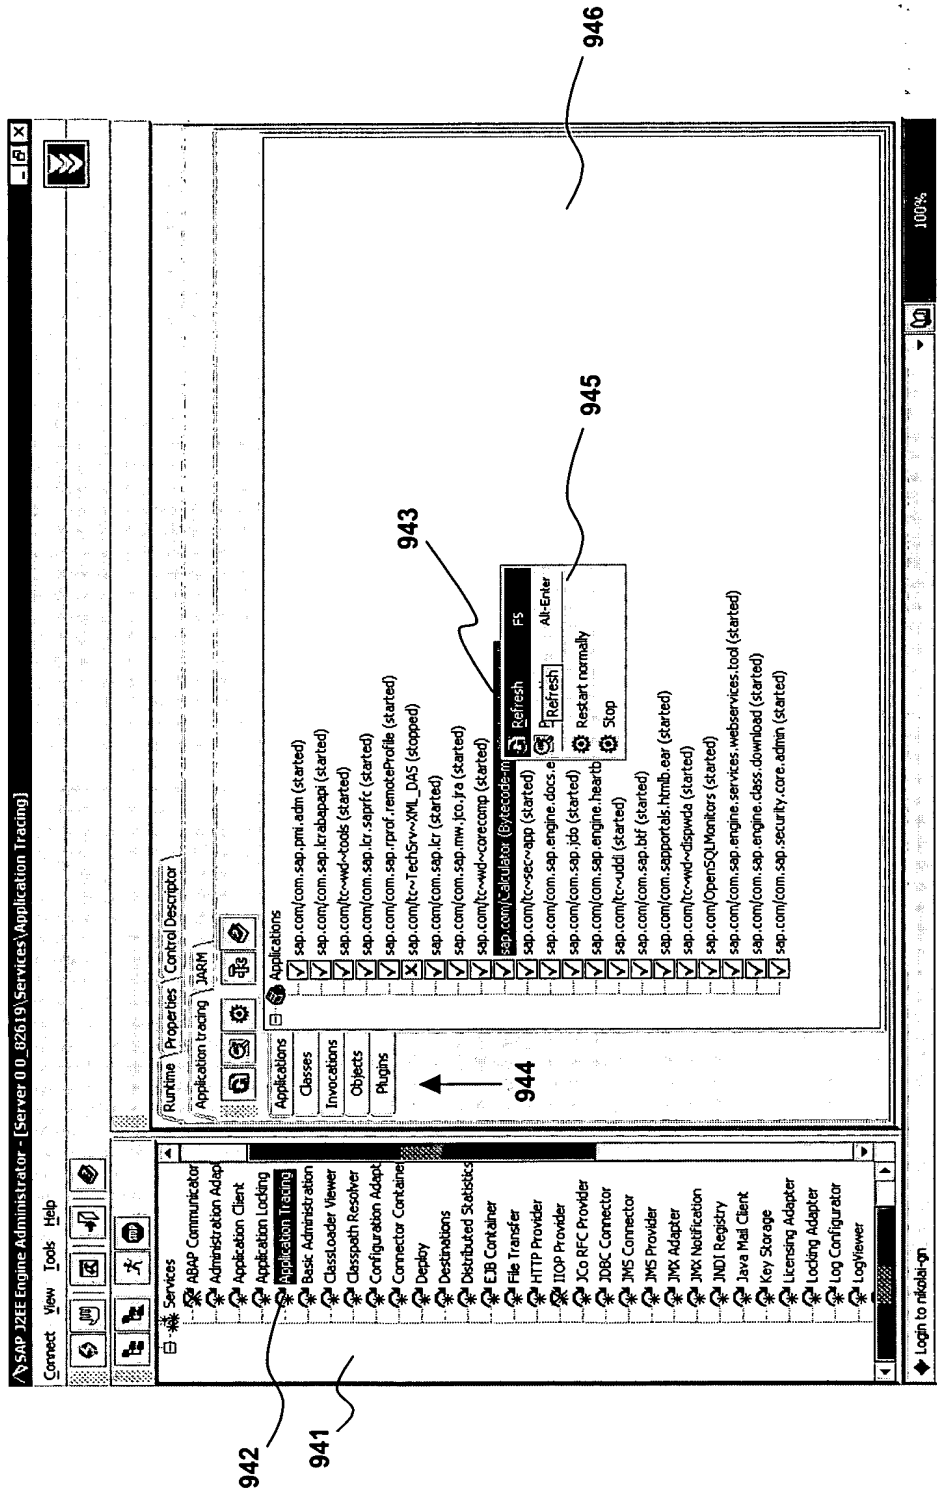


FIG. 9B

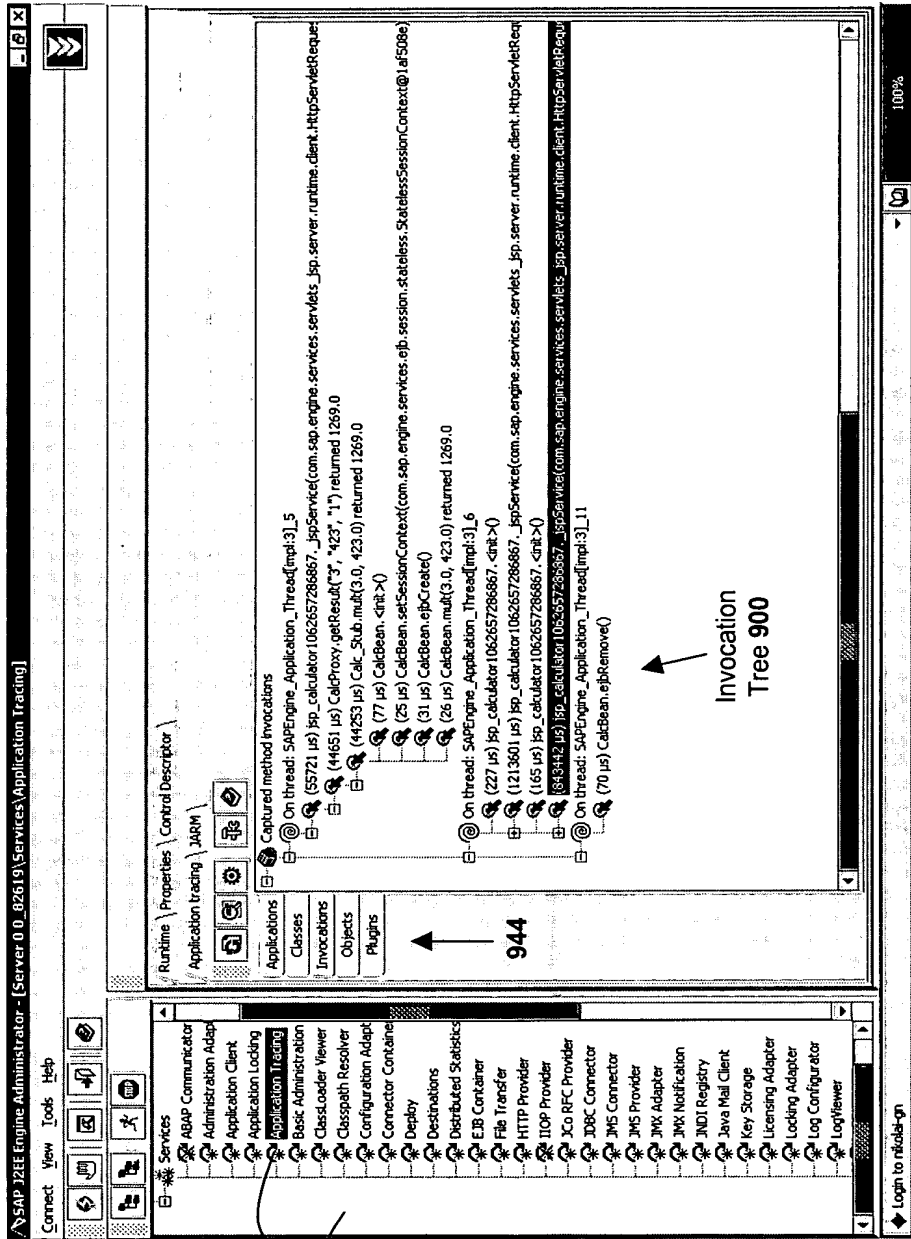


FIG. 9C



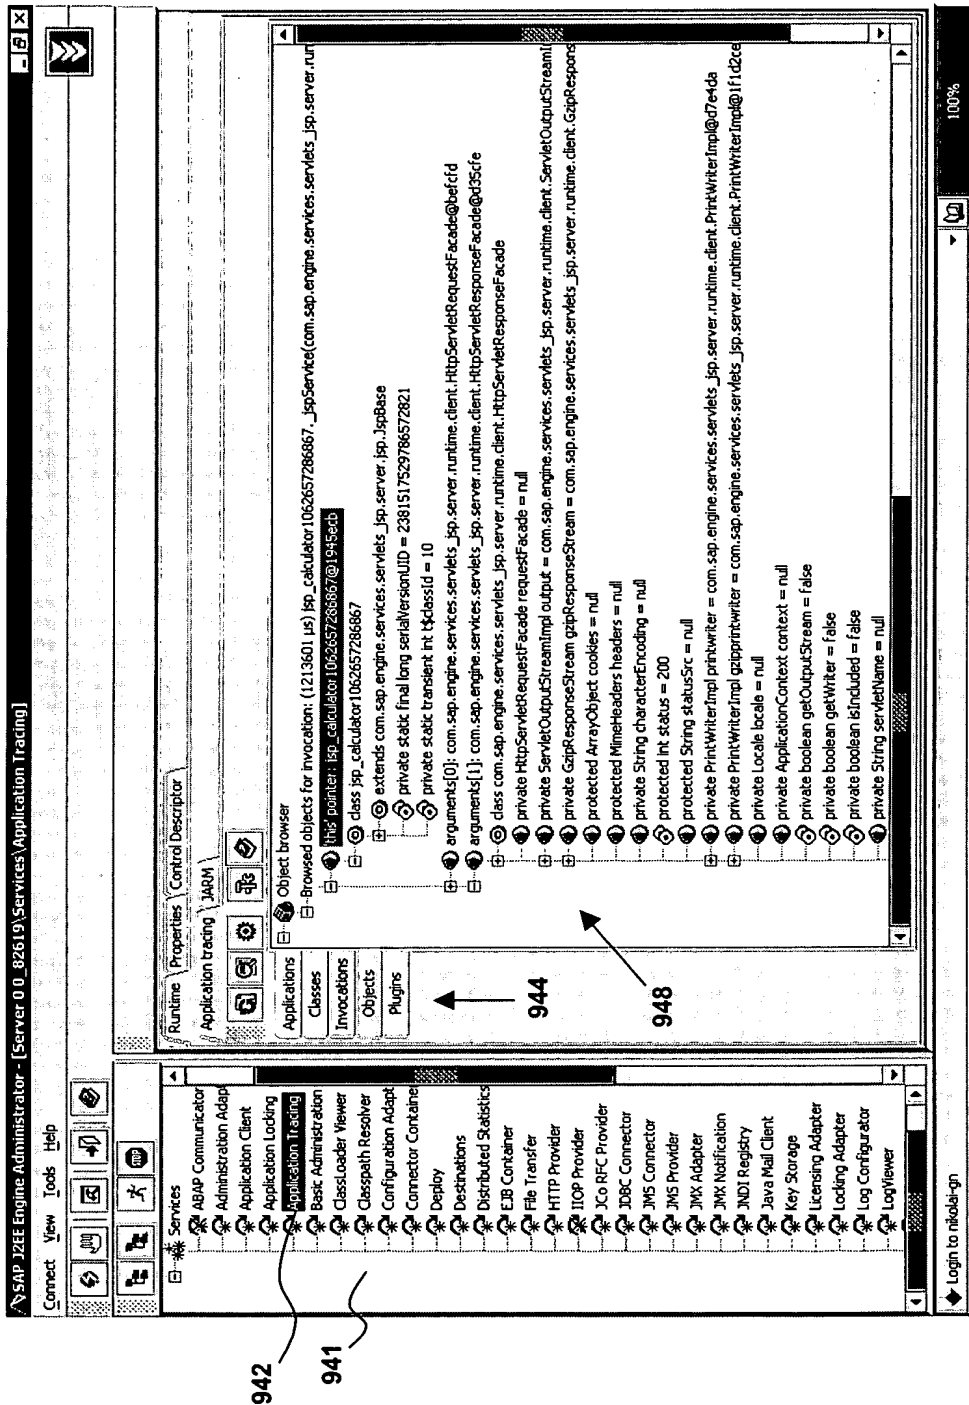


FIG. 9E

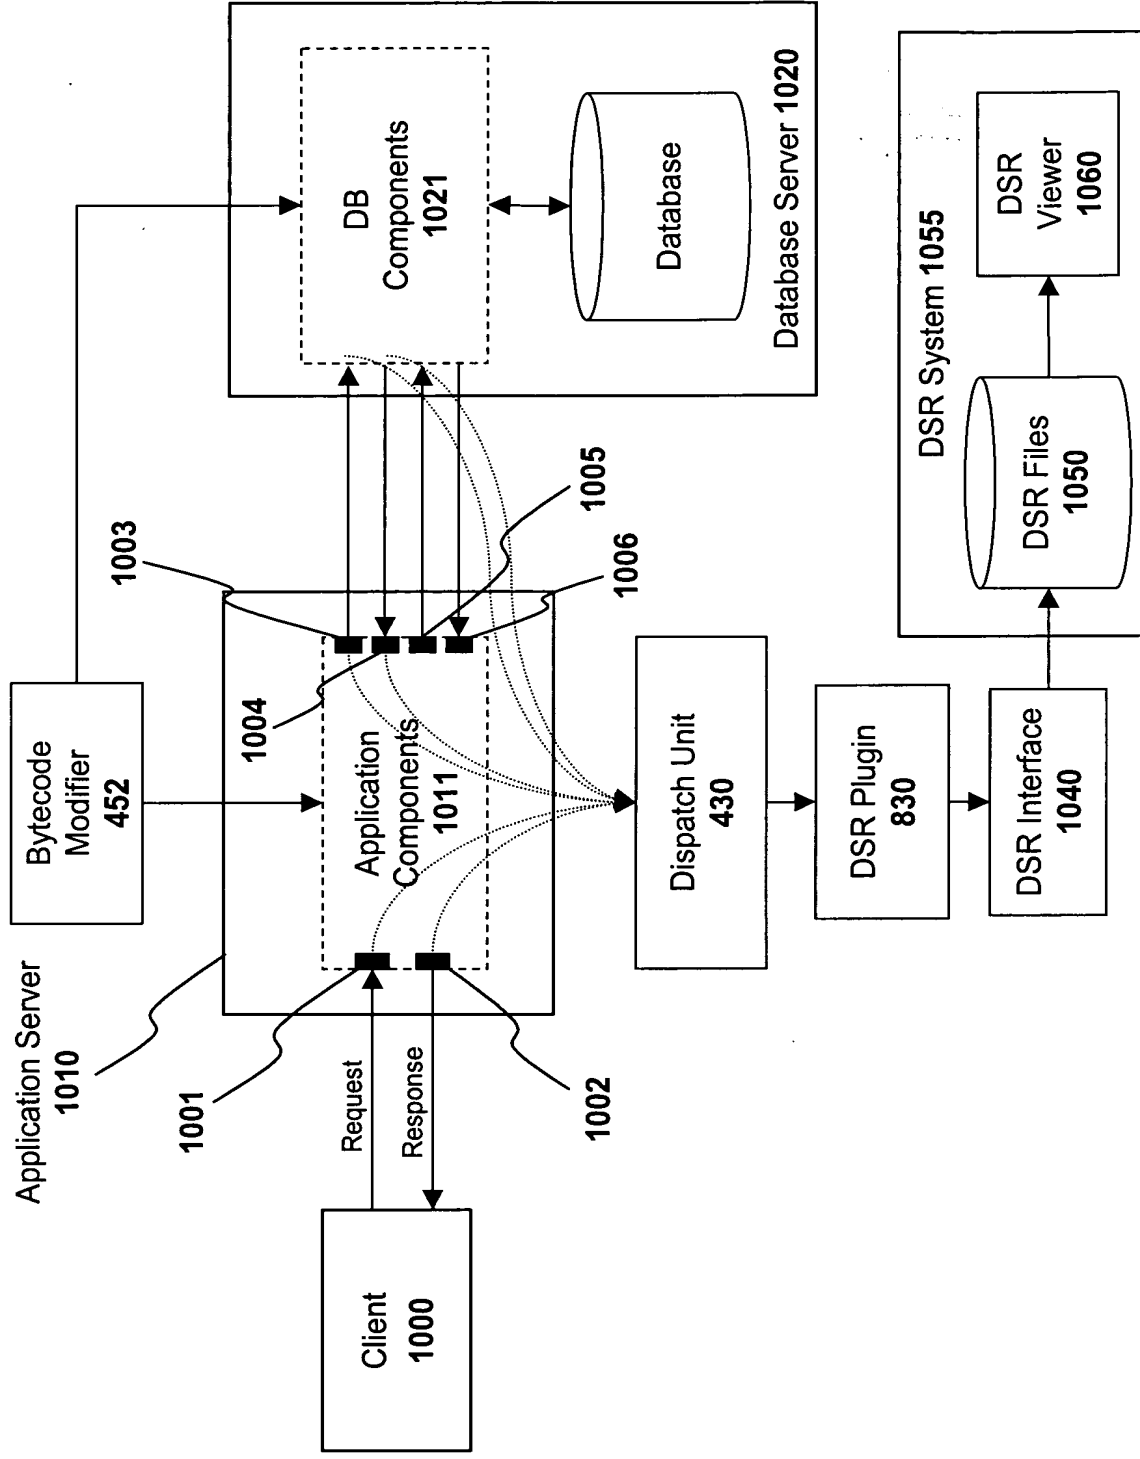


FIG. 10A

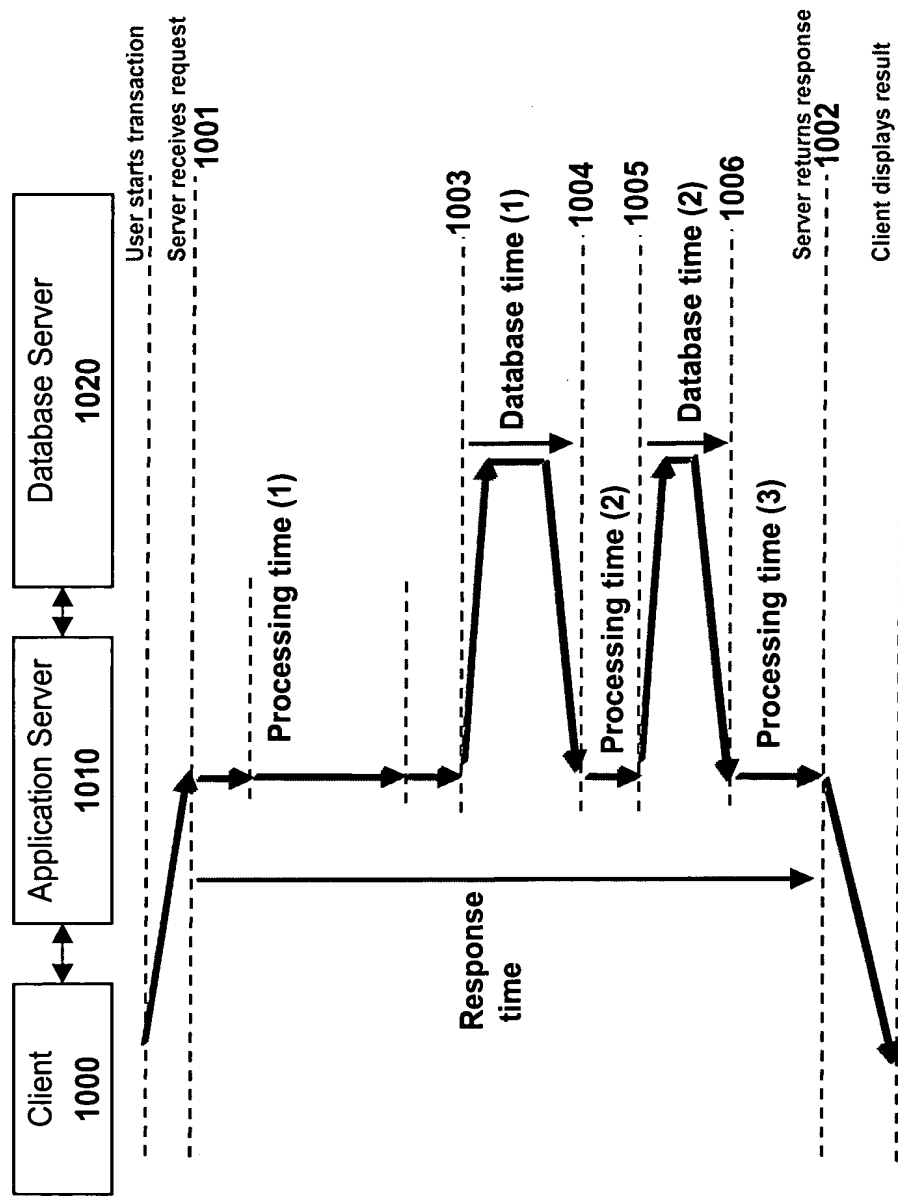


FIG. 10B

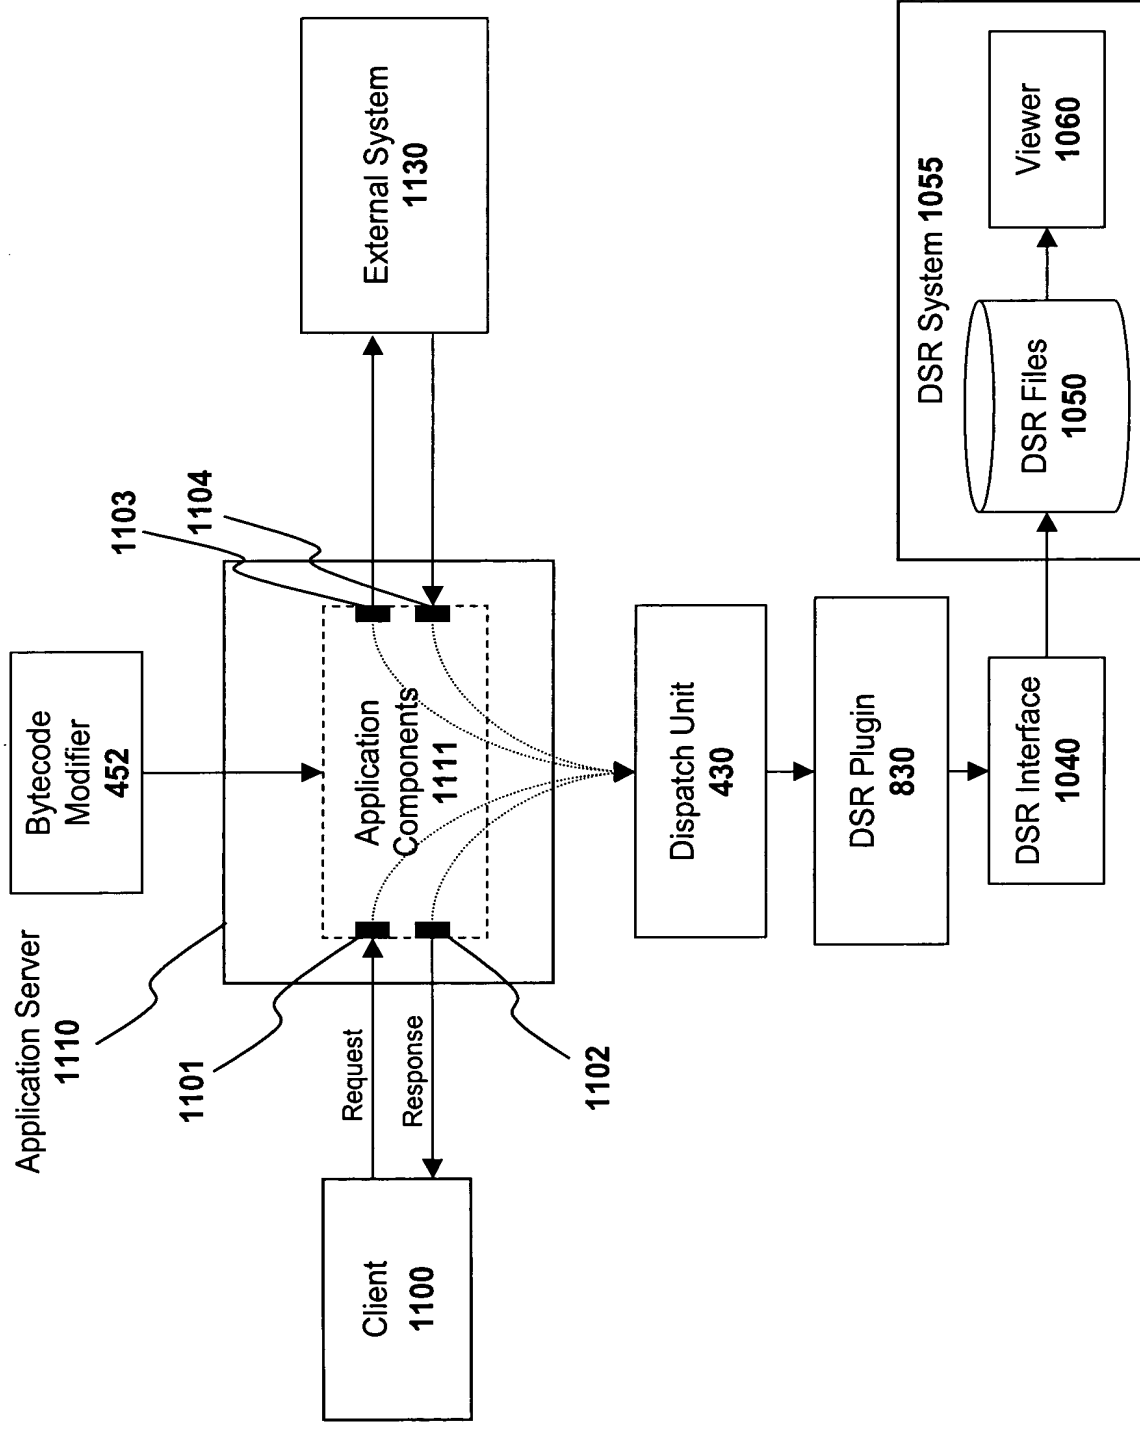


FIG. 11A

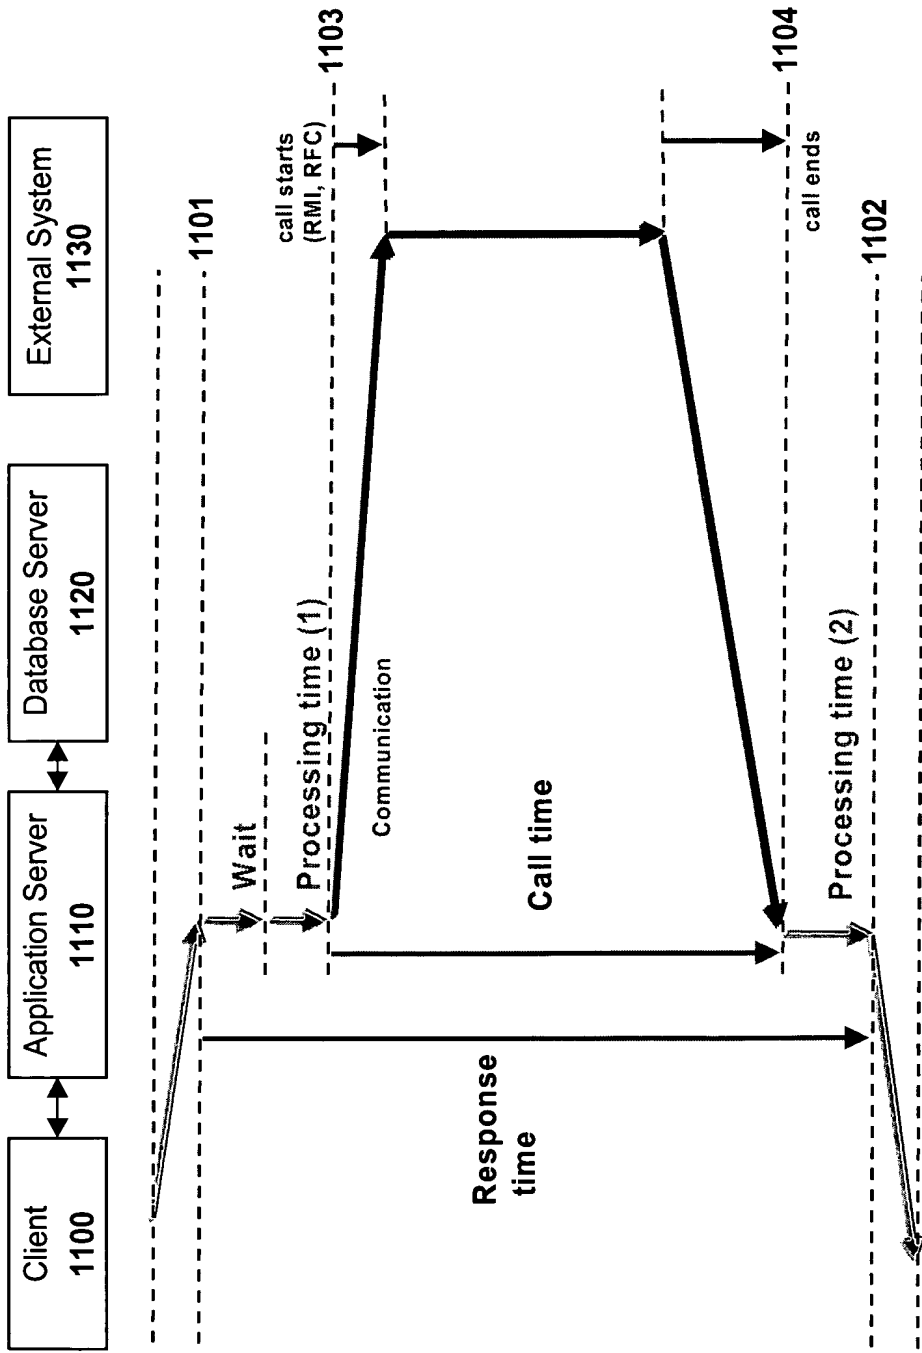


FIG. 11B



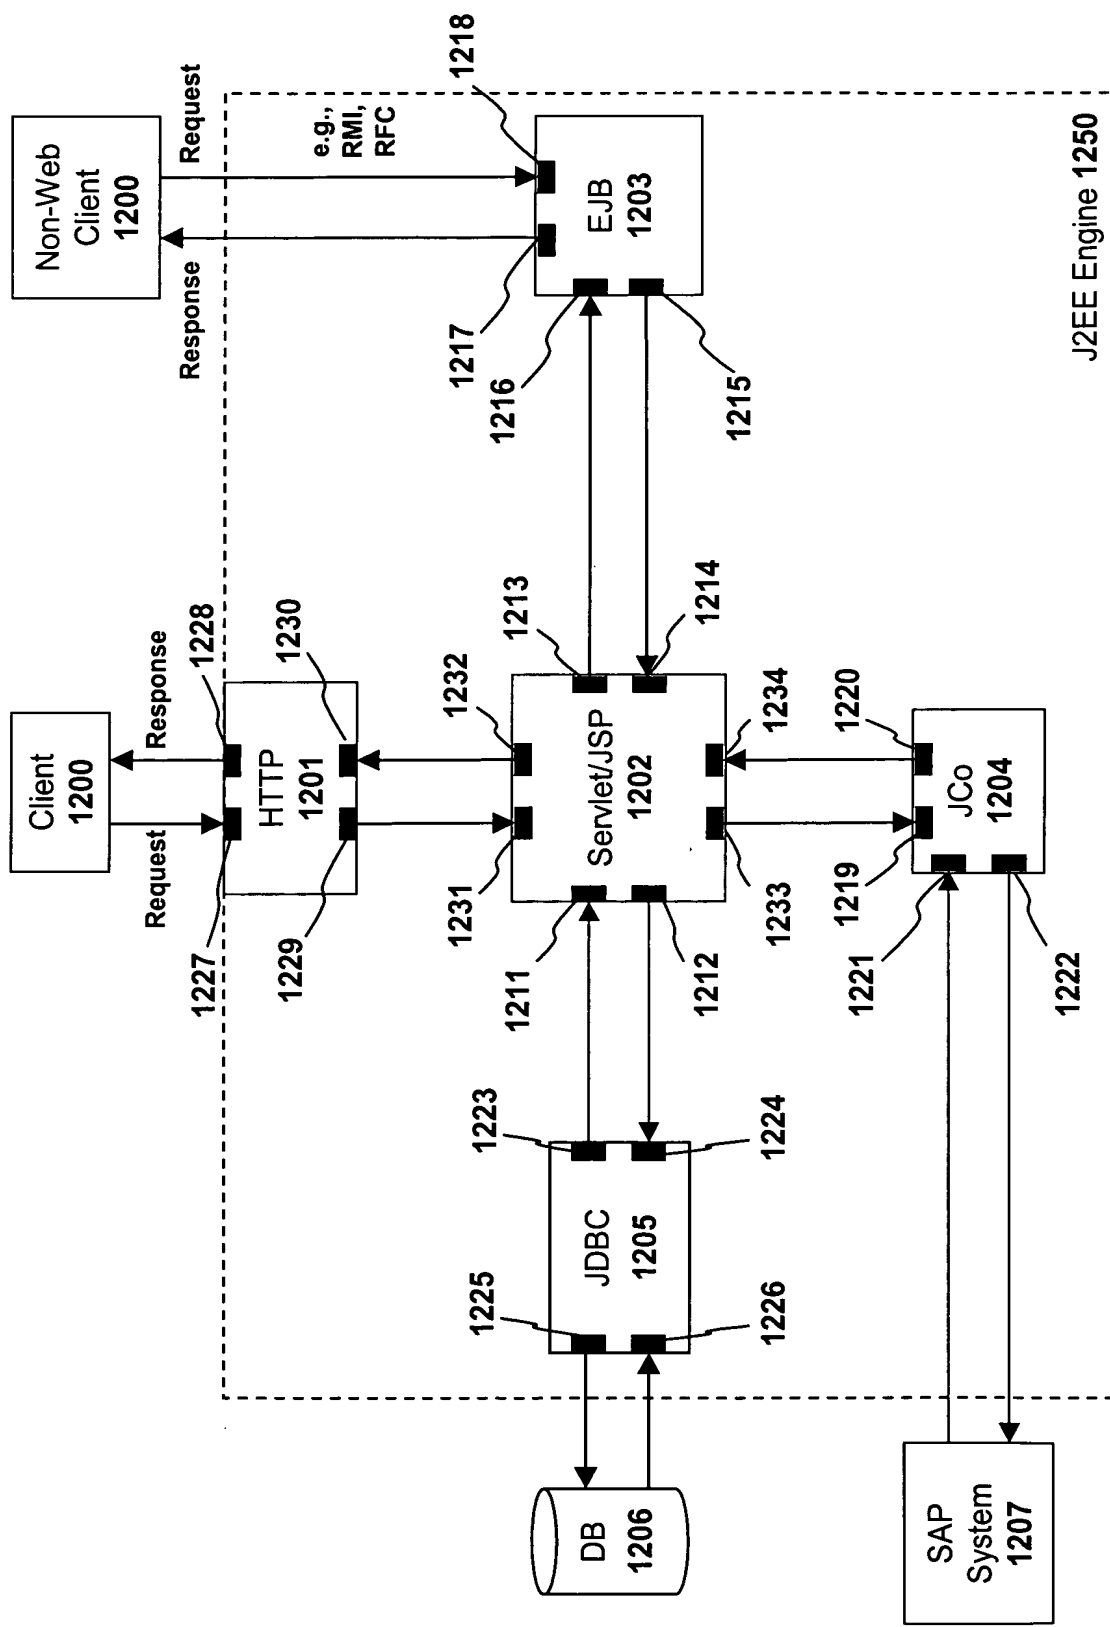


FIG. 12

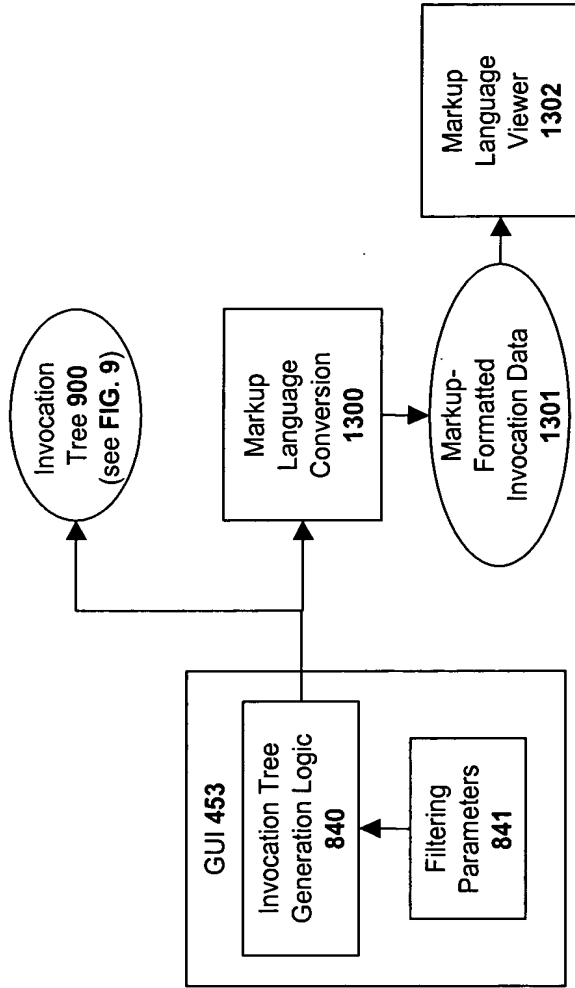


FIG. 13

FOR EACH CLASSFILE HAVING  
A METHOD TO BE MODIFIED:

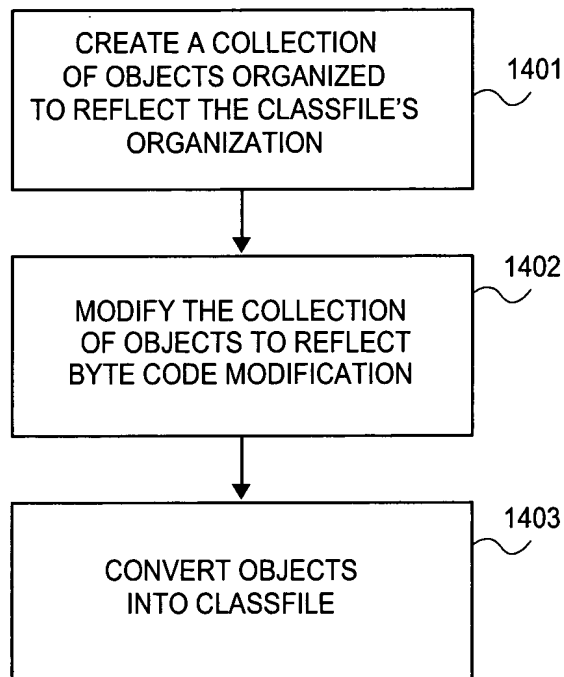
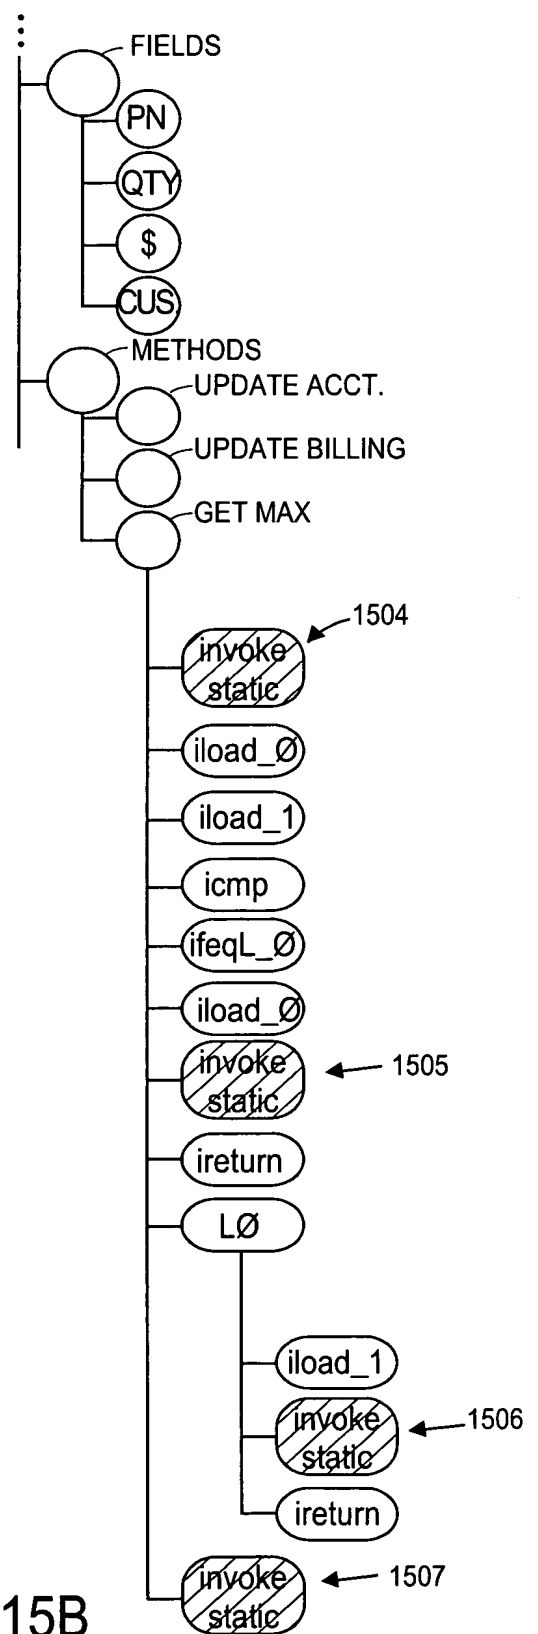
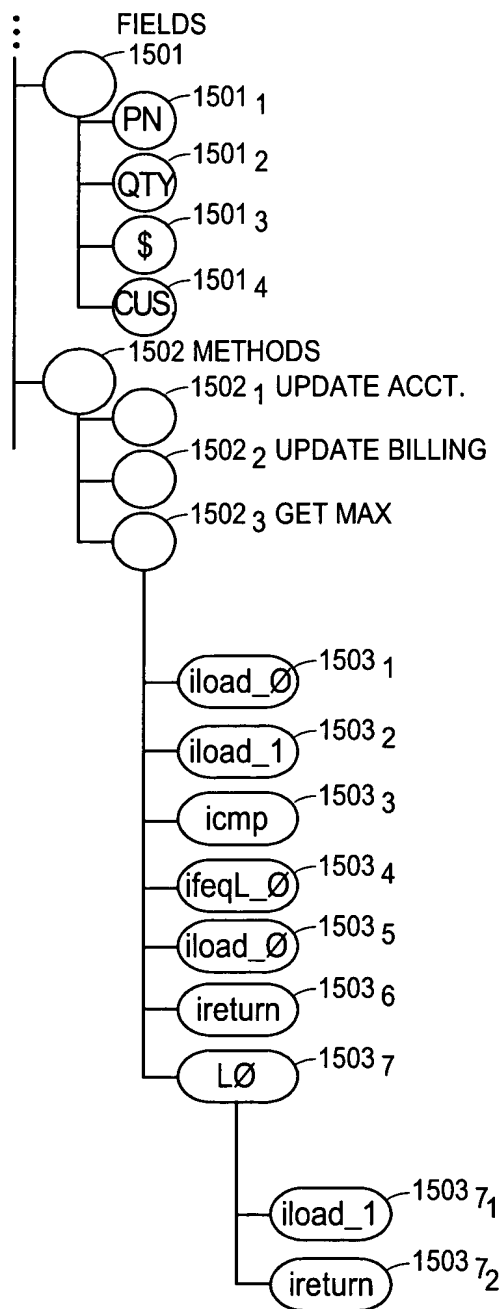


FIG. 14



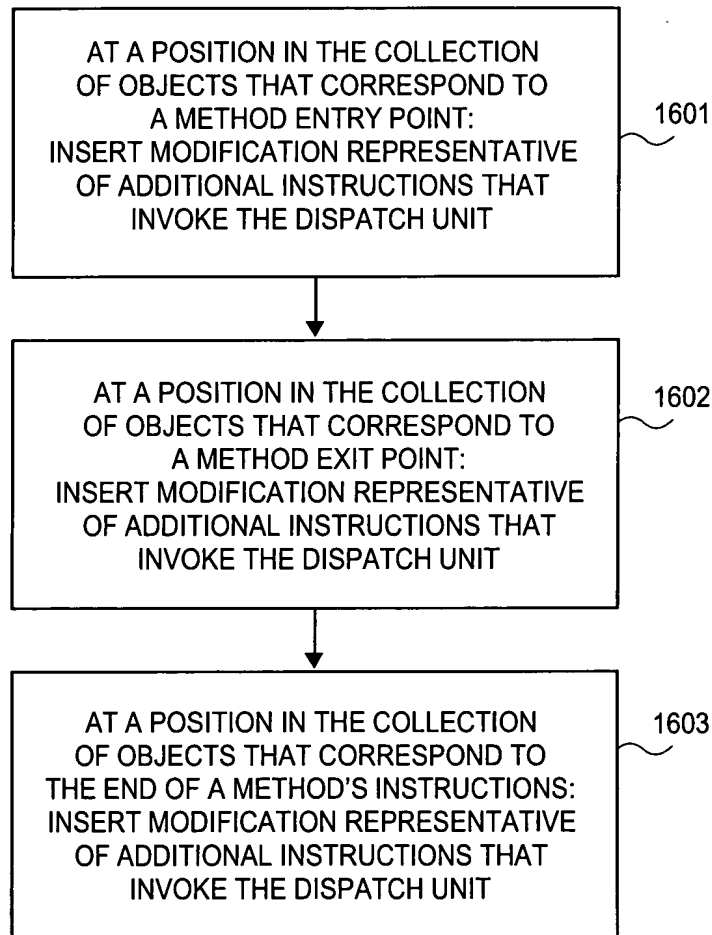


FIG. 16

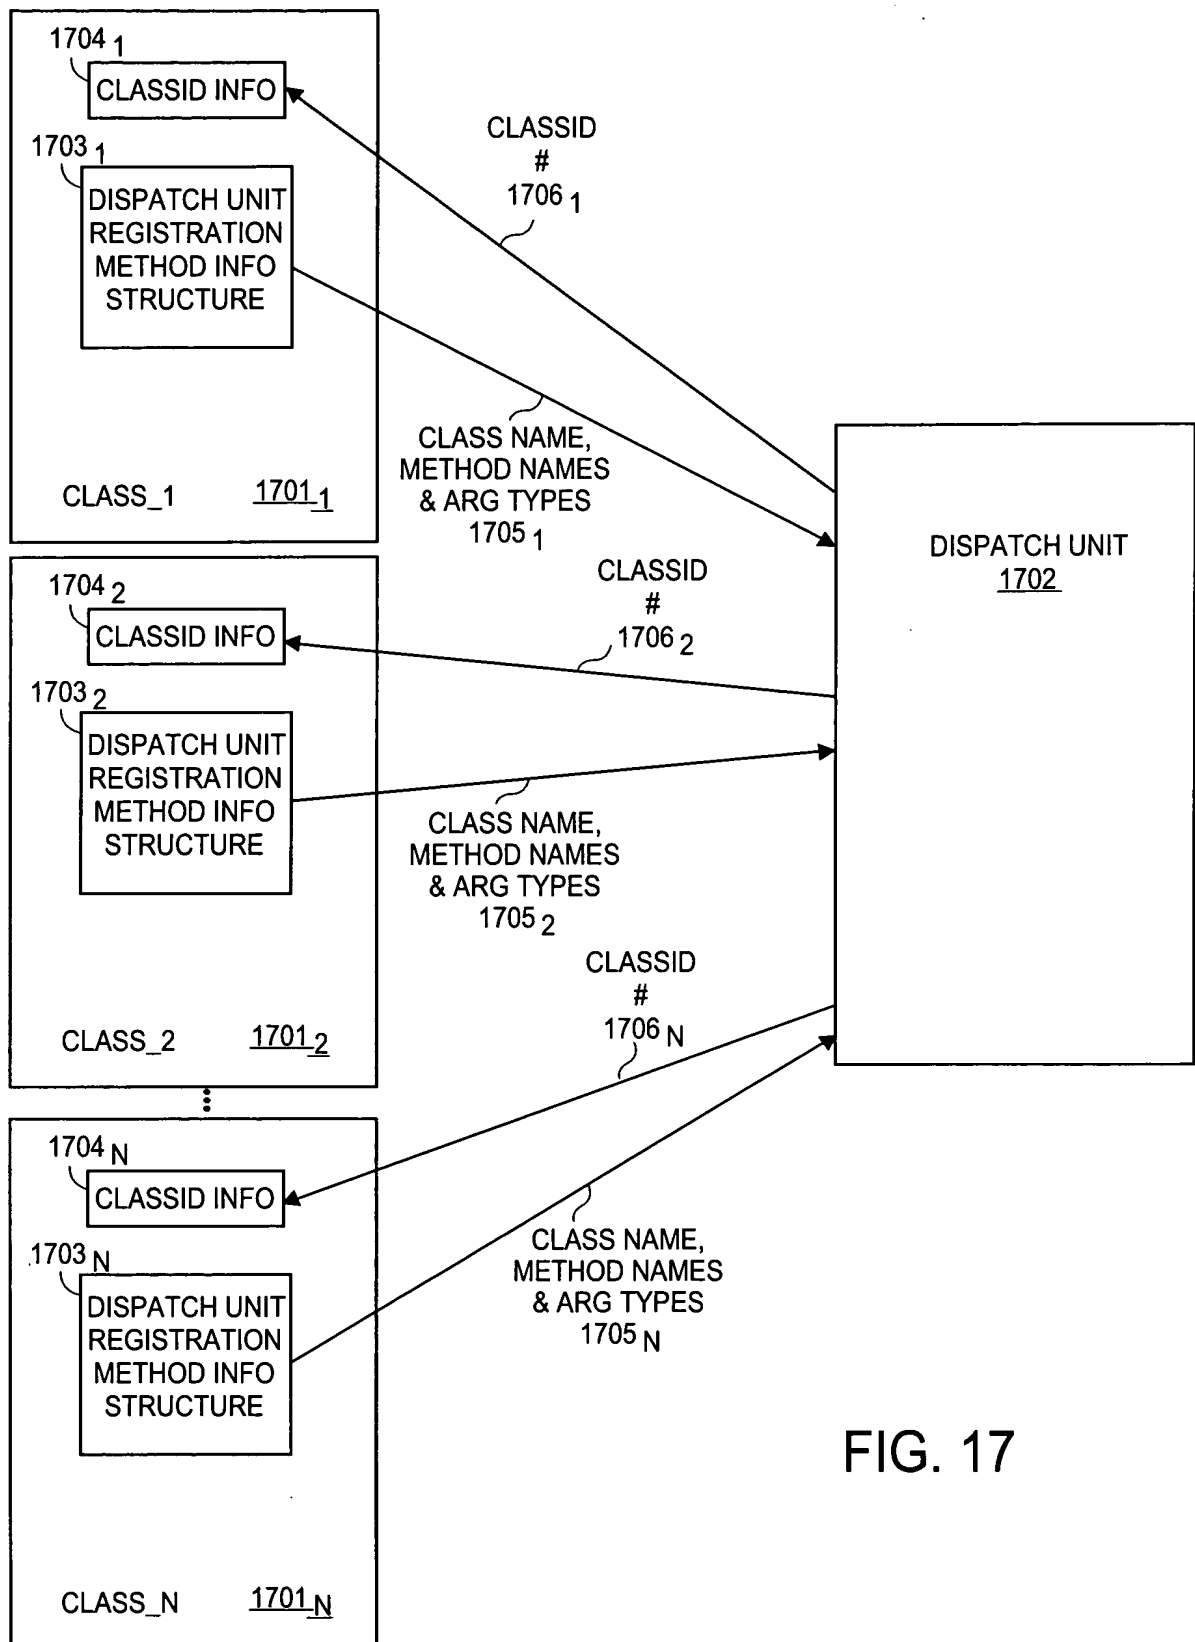


FIG. 17

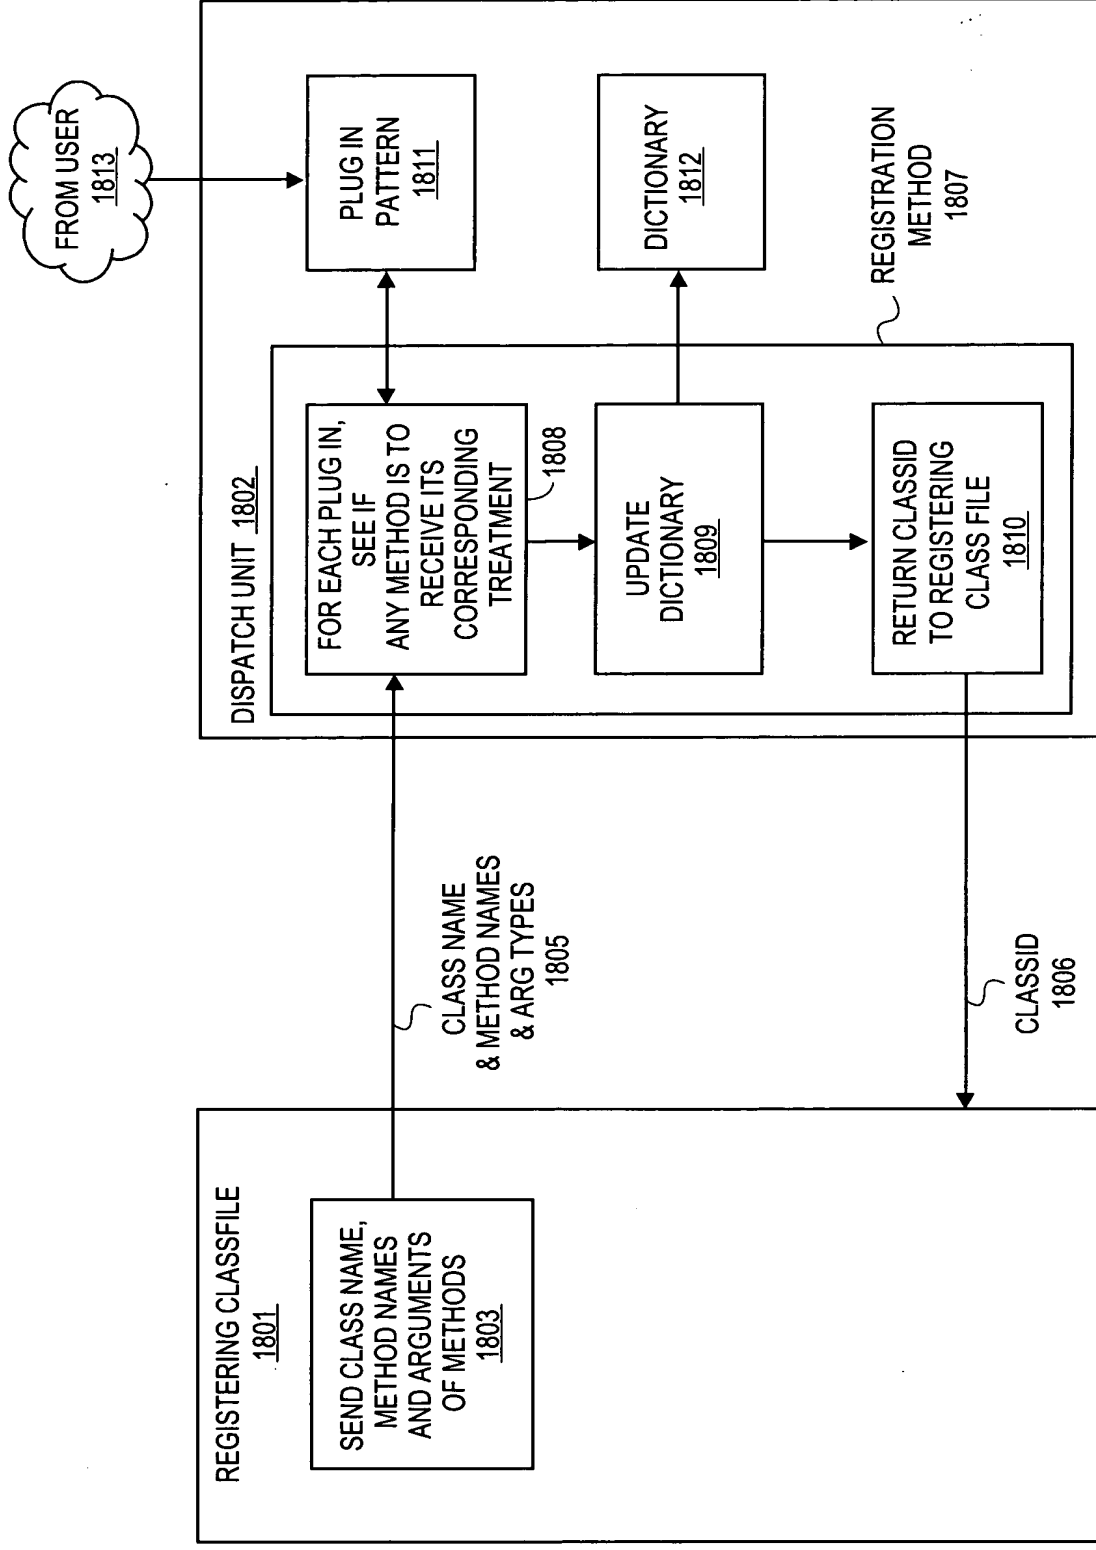


FIG. 18

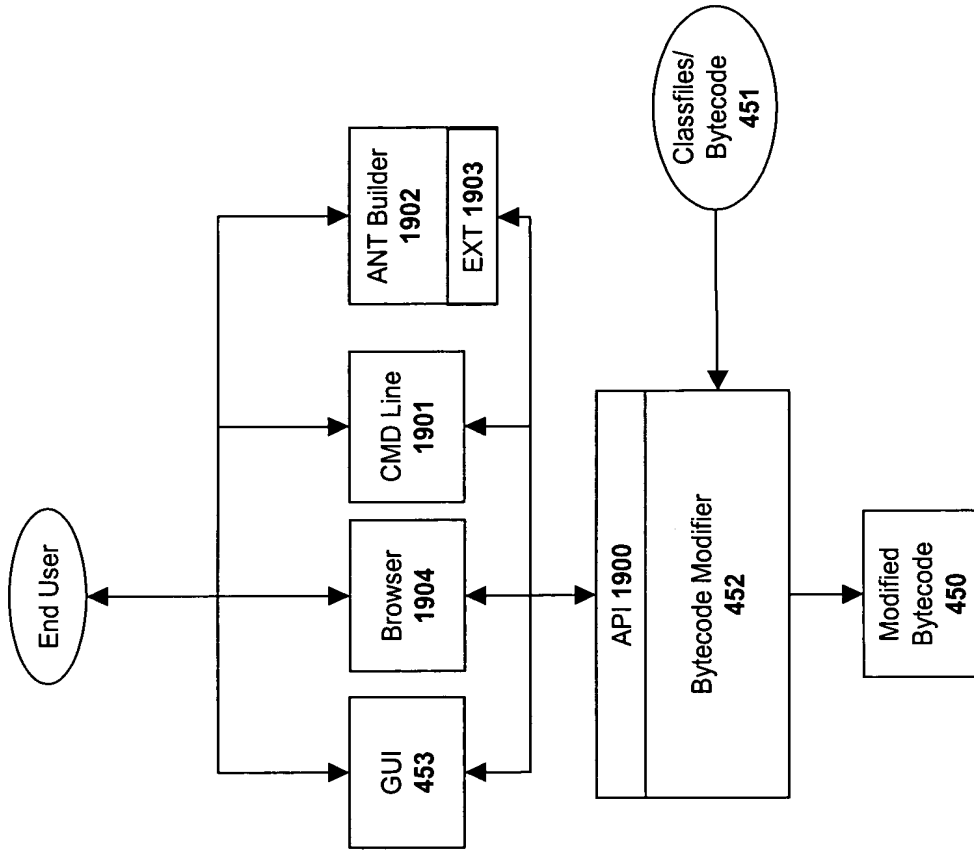


FIG. 19A



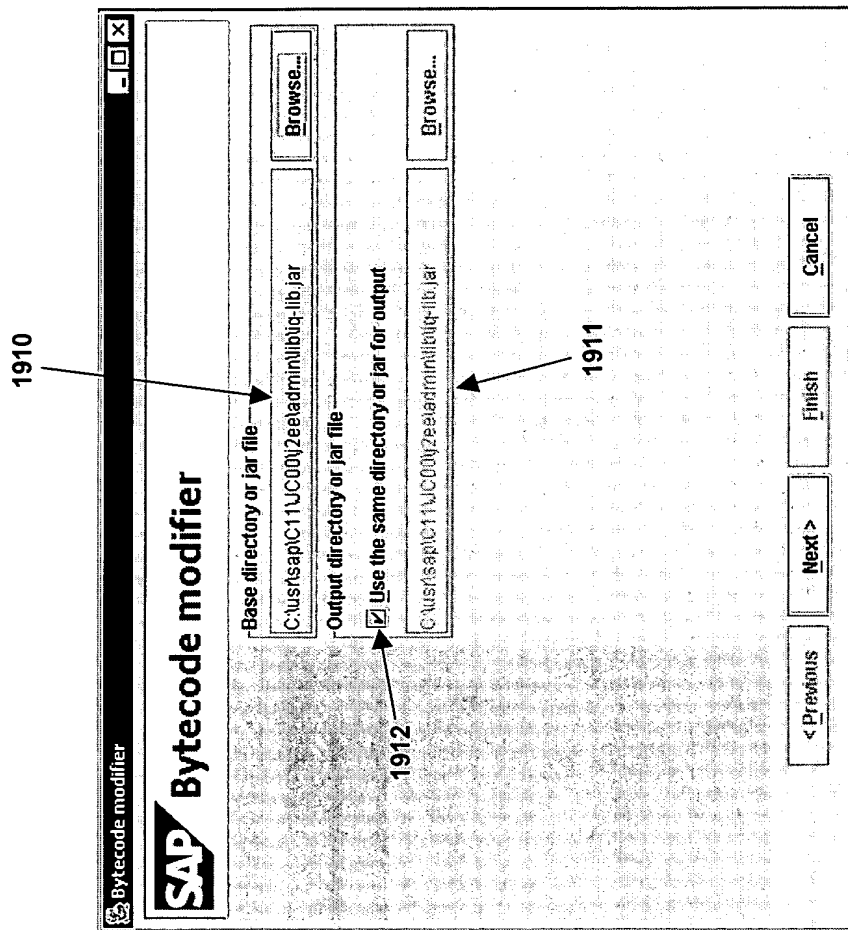


FIG. 19B

1921

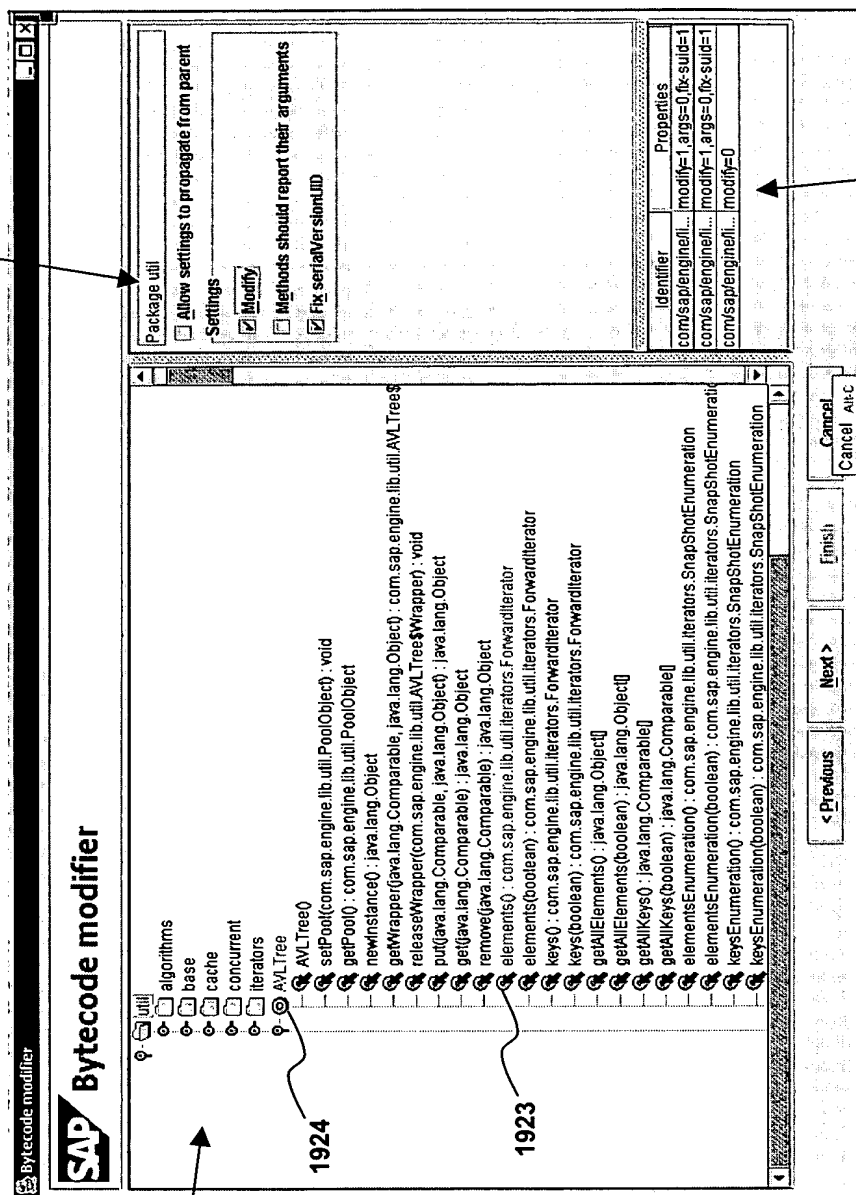


FIG. 19C

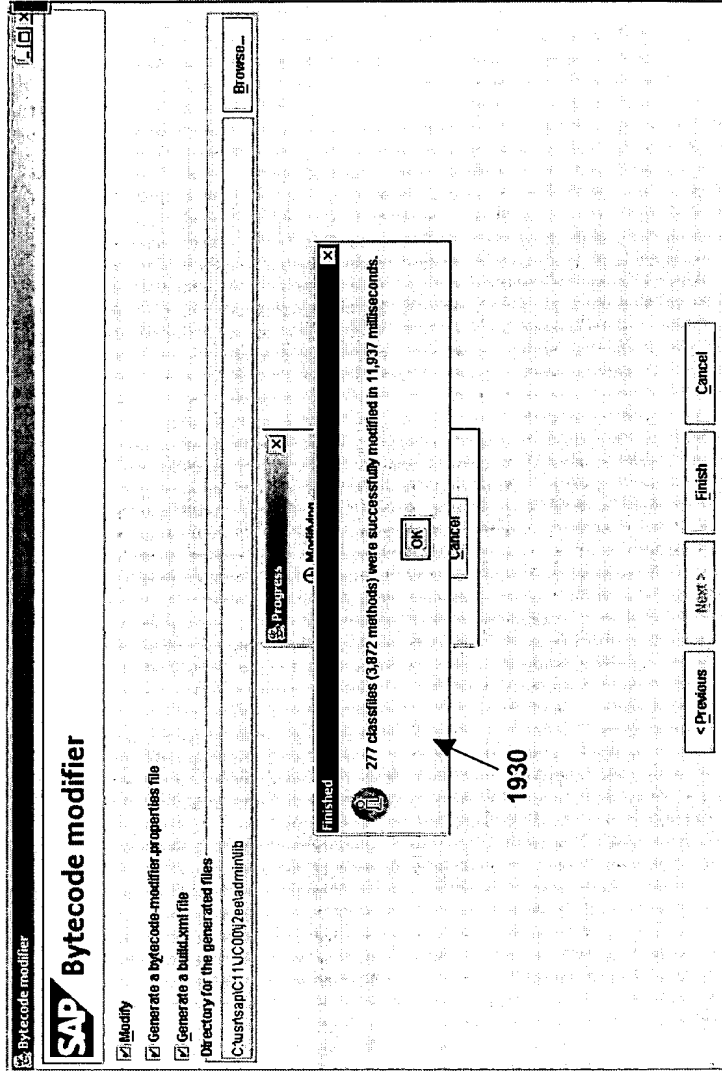


FIG. 19D



```
// Direct modification of a file
CFModifier modifier = new CFModifier();
modifier.modify("D:/temp/A.class", null);

// Modification in a classloader
Class defineModifiedClass(byte[] data) {
    CFModifier modifier = new CFModifier();
    byte[] data1 = modifier.modify(data);
    return defineClass(data1);
}
```

```
>java -classpath bytecode.jar com/say/engine/library/bytecode/
Usage:
modify <conf-file> <input-file> [<output-file>]
Runs the bytecode modifier.
    <conf-file> The configuration file for the m
    <input-file> A jar file or a directory.
    <output-file> A jar file or a directory. By de
    <input-file> and <output-file> must either be both jar
>_
```

FIG. 19F

ANT Builder 1902
EXT 1903



```

<taskdef name="modify"
  classname="com.sap.engine.library.bytecode.modifier.ModifierTask"
  classpath="bytecode.jar"/>
<modify conf="bytecode-modifier.properties"
  inputFile="D:\temp\classes" outputFile="D:\temp\classes1"
  check="true" verbosity="2" failonerror="true"/>

```



1950

FIG. 19G